



THE MOST ADVANCED
COMPRESSOR TECHNOLOGY AVAILABLE

06D, 06E & 06CC Reciprocating Compressors

THE MOST ADVANCED COMPRESSOR
TECHNOLOGY AVAILABLE

06D RECIPROCATING COMPRESSOR



06DR109


R134a Refrigerant

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR109	3	8.7	2	7/8	5/8	190	3

Available Voltages

208/230-3-60
460-3-60
575-3-60

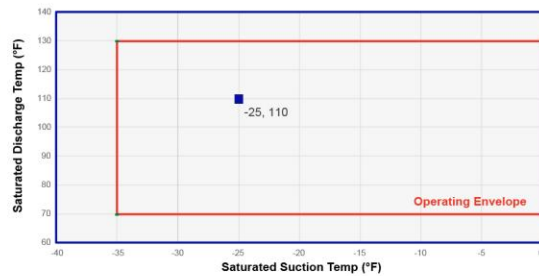


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	8181	9636	11274	13115	15176	17477	20036	22872	26004	29451	33231	37363	41866	46759
	Power (kW)	1.18	1.26	1.34	1.42	1.49	1.56	1.62	1.68	1.73	1.77	1.8	1.83	1.84	1.84
	EER (BTU/WATT-HR)	6.95	7.64	8.41	9.25	10.18	11.21	12.35	13.62	15.05	16.64	18.43	20.45	22.74	25.35
	Current (AMPS)	2.37	2.46	2.55	2.63	2.71	2.78	2.85	2.9	2.95	2.99	3.02	3.04	3.04	3.04
110	Capacity (Btu/hr)	6422	7713	9152	10757	12546	14539	16753	19209	21924	24917	28207	31813	35754	40048
	Power (kW)	1.2	1.31	1.41	1.52	1.62	1.72	1.82	1.91	2	2.08	2.15	2.22	2.28	2.33
	EER (BTU/WATT-HR)	5.36	5.91	6.48	7.09	7.74	8.44	9.21	10.05	10.98	11.99	13.1	14.33	15.69	17.19
	Current (AMPS)	2.45	2.54	2.64	2.74	2.84	2.94	3.04	3.14	3.24	3.34	3.43	3.52	3.6	3.68
130	Capacity (Btu/hr)	4785	5920	7166	8542	10066	11757	13633	15714	18018	20565	23372	26458	29843	33545
	Power (kW)	1.17	1.3	1.43	1.56	1.7	1.83	1.96	2.09	2.21	2.33	2.45	2.56	2.66	2.76
	EER (BTU/WATT-HR)	4.1	4.56	5.01	5.46	5.93	6.43	6.96	7.53	8.15	8.83	9.56	10.36	11.23	12.18
	Current (AMPS)	2.44	2.54	2.66	2.78	2.91	3.05	3.2	3.35	3.51	3.67	3.83	4	4.17	4.34

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR013	3	13	4	1 1/8	5/8	230	4 1/2


Available Voltages
208/230-3-60
460-3-60
575-3-60

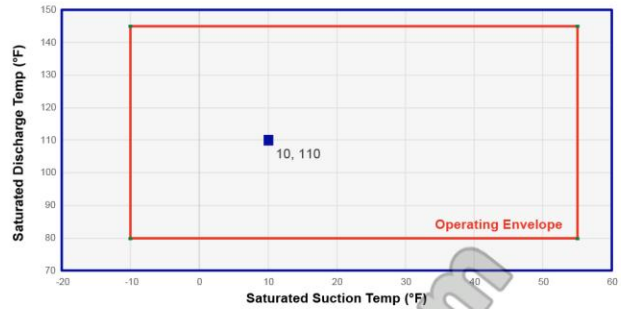

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	10510	12661	15084	17804	20849	24246	28021	32200	36812	41882	47438	53506	60113	67287
	Power (kW)	1.52	1.65	1.78	1.9	2.01	2.11	2.21	2.29	2.36	2.41	2.45	2.48	2.48	2.47
	EER (BTU/WATT-HR)	6.9	7.67	8.49	9.39	10.38	11.48	12.71	14.08	15.61	17.35	19.33	21.6	24.22	27.27
	Current (AMPS)	2.95	3.15	3.33	3.48	3.61	3.72	3.81	3.88	3.94	3.99	4.03	4.07	4.09	4.12
110	Capacity (Btu/hr)	7559	9465	11590	13962	16606	19551	22823	26449	30455	34868	39715	45023	50820	57130
	Power (kW)	1.5	1.68	1.86	2.03	2.19	2.35	2.5	2.64	2.77	2.88	2.99	3.07	3.14	3.19
	EER (BTU/WATT-HR)	5.03	5.63	6.24	6.89	7.57	8.32	9.13	10.02	11	12.09	13.3	14.66	16.18	17.9
	Current (AMPS)	2.89	3.16	3.4	3.61	3.8	3.96	4.09	4.21	4.31	4.39	4.45	4.5	4.54	4.58
130	Capacity (Btu/hr)	4832	6495	8327	10353	12602	15099	17871	20946	24350	28110	32252	36804	41793	47245
	Power (kW)	1.32	1.56	1.79	2.03	2.25	2.47	2.69	2.9	3.09	3.28	3.45	3.61	3.75	3.88
	EER (BTU/WATT-HR)	3.65	4.17	4.64	5.11	5.59	6.1	6.64	7.23	7.87	8.58	9.35	10.2	11.14	12.18
	Current (AMPS)	2.67	3.02	3.33	3.6	3.84	4.06	4.24	4.4	4.54	4.65	4.74	4.82	4.88	4.92

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR316	5	15.9	4	1 1/8	5/8	235	4 1/2

Available Voltages
208/230-3-60
460-3-60
575-3-60

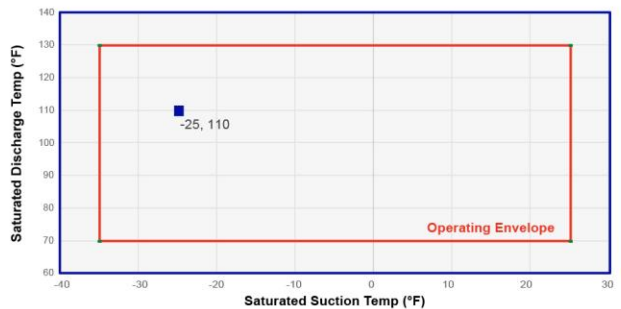


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	15434	18016	20924	24195	27861	31959	36523	41587	47186	53354	60127	67538	75623	84416
	Power (kW)	2.14	2.27	2.41	2.54	2.66	2.78	2.89	3	3.09	3.17	3.24	3.29	3.33	3.35
	EER (BTU/WATT-HR)	7.22	7.92	8.68	9.53	10.46	11.48	12.62	13.88	15.28	16.84	18.57	20.52	22.7	25.16
	Current (AMPS)	4.32	4.46	4.59	4.71	4.83	4.94	5.04	5.13	5.21	5.27	5.33	5.38	5.41	5.43
110	Capacity (Btu/hr)	12521	14816	17370	20218	23395	26935	30872	35243	40080	45420	51296	57742	64795	72488
	Power (kW)	2.34	2.52	2.69	2.87	3.04	3.21	3.37	3.53	3.68	3.82	3.95	4.06	4.17	4.26
	EER (BTU/WATT-HR)	5.36	5.89	6.45	7.05	7.69	8.39	9.15	9.98	10.9	11.9	13	14.21	15.54	17.02
	Current (AMPS)	4.62	4.74	4.87	5.01	5.16	5.31	5.47	5.64	5.81	5.98	6.16	6.34	6.52	6.7
130	Capacity (Btu/hr)	9814	11841	14060	16505	19210	22212	25543	29240	33335	37865	42863	48365	54404	61016
	Power (kW)	2.47	2.69	2.92	3.14	3.36	3.59	3.8	4.02	4.23	4.43	4.62	4.8	4.98	5.14
	EER (BTU/WATT-HR)	3.97	4.4	4.82	5.26	5.71	6.19	6.72	7.28	7.89	8.55	9.28	10.07	10.93	11.88
	Current (AMPS)	4.73	4.88	5.05	5.25	5.47	5.71	5.97	6.25	6.55	6.87	7.21	7.57	7.94	8.33

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR718	5	18.3	4	1 3/8	7/8	250	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

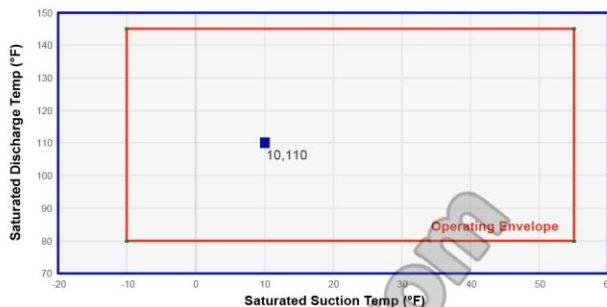

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	18427	21436	24843	28692	33026	37886	43317	49362	56062	63462	71604	80530	90285	100911
	Power (kW)	2.36	2.53	2.69	2.86	3.01	3.15	3.28	3.39	3.48	3.55	3.6	3.63	3.63	3.6
	EER (BTU/WATT-HR)	7.82	8.48	9.22	10.05	10.98	12.03	13.23	14.58	16.11	17.86	19.87	22.19	24.88	28.05
	Current (AMPS)	4.53	4.74	4.94	5.13	5.3	5.46	5.6	5.73	5.83	5.9	5.95	5.98	5.97	5.93
110	Capacity (Btu/hr)	15052	17715	20690	24021	27750	31919	36573	41754	47505	53869	60889	68608	77068	86313
	Power (kW)	2.51	2.73	2.95	3.17	3.38	3.59	3.79	3.98	4.15	4.31	4.45	4.57	4.66	4.74
	EER (BTU/WATT-HR)	6	6.49	7.01	7.58	8.2	8.89	9.65	10.5	11.45	12.5	13.69	15.02	16.52	18.23
	Current (AMPS)	4.75	5	5.24	5.49	5.72	5.95	6.17	6.38	6.58	6.75	6.92	7.06	7.18	7.27
130	Capacity (Btu/hr)	11829	14191	16779	19635	22804	26328	30250	34612	39458	44831	50773	57329	64539	72448
	Power (kW)	2.54	2.81	3.09	3.38	3.66	3.94	4.21	4.48	4.74	4.99	5.22	5.44	5.64	5.82
	EER (BTU/WATT-HR)	4.66	5.04	5.42	5.82	6.24	6.69	7.18	7.73	8.33	8.99	9.73	10.54	11.45	12.45
	Current (AMPS)	4.81	5.1	5.41	5.71	6.02	6.33	6.64	6.95	7.25	7.54	7.82	8.1	8.35	8.6

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR820	6.5	20	4	1 3/8	7/8	260	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

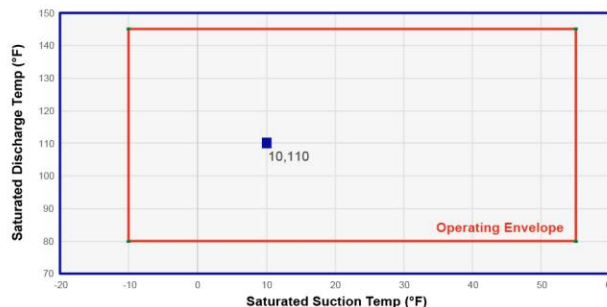

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	20361	23802	27639	31909	36651	41903	47701	54085	61092	68761	77129	86234	96115	106808
	Power (kW)	2.66	2.85	3.03	3.2	3.36	3.52	3.66	3.78	3.89	3.98	4.04	4.09	4.11	4.1
	EER (BTU/WATT-HR)	7.65	8.36	9.13	9.97	10.9	11.92	13.05	14.31	15.71	17.29	19.08	21.09	23.4	26.05
	Current (AMPS)	5.75	5.9	6.04	6.18	6.32	6.45	6.57	6.68	6.78	6.86	6.92	6.97	6.99	6.99
110	Capacity (Btu/hr)	16336	19459	22906	26715	30925	35572	40696	46334	52523	59303	66711	74784	83562	93081
	Power (kW)	2.79	3.03	3.27	3.51	3.74	3.97	4.18	4.39	4.58	4.75	4.91	5.05	5.16	5.26
	EER (BTU/WATT-HR)	5.85	6.41	7	7.61	8.26	8.97	9.73	10.57	11.48	12.49	13.59	14.82	16.19	17.71
	Current (AMPS)	6.01	6.14	6.29	6.46	6.63	6.82	7.02	7.23	7.44	7.65	7.87	8.08	8.3	8.5
130	Capacity (Btu/hr)	12471	15262	18305	21640	25303	29333	33767	38645	44003	49880	56313	63341	71002	79333
	Power (kW)	2.79	3.1	3.4	3.71	4.01	4.31	4.6	4.89	5.16	5.42	5.67	5.91	6.13	6.32
	EER (BTU/WATT-HR)	4.46	4.93	5.38	5.84	6.31	6.81	7.34	7.91	8.53	9.2	9.92	10.72	11.59	12.55
	Current (AMPS)	6.01	6.18	6.38	6.61	6.88	7.17	7.5	7.84	8.22	8.61	9.02	9.46	9.9	10.36

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR718	5	18.3	4	1 3/8	7/8	250	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

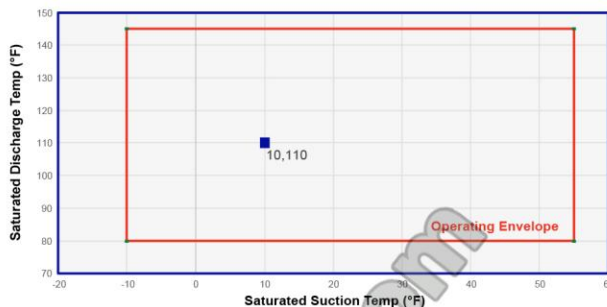

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	18427	21436	24843	28692	33026	37886	43317	49362	56062	63462	71604	80530	90285	100911
	Power (kW)	2.36	2.53	2.69	2.86	3.01	3.15	3.28	3.39	3.48	3.55	3.6	3.63	3.63	3.6
	EER (BTU/WATT-HR)	7.82	8.48	9.22	10.05	10.98	12.03	13.23	14.58	16.11	17.86	19.87	22.19	24.88	28.05
	Current (AMPS)	4.53	4.74	4.94	5.13	5.3	5.46	5.6	5.73	5.83	5.9	5.95	5.98	5.97	5.93
110	Capacity (Btu/hr)	15052	17715	20690	24021	27750	31919	36573	41754	47505	53869	60889	68608	77068	86313
	Power (kW)	2.51	2.73	2.95	3.17	3.38	3.59	3.79	3.98	4.15	4.31	4.45	4.57	4.66	4.74
	EER (BTU/WATT-HR)	6	6.49	7.01	7.58	8.2	8.89	9.65	10.5	11.45	12.5	13.69	15.02	16.52	18.23
	Current (AMPS)	4.75	5	5.24	5.49	5.72	5.95	6.17	6.38	6.58	6.75	6.92	7.06	7.18	7.27
130	Capacity (Btu/hr)	11829	14191	16779	19635	22804	26328	30250	34612	39458	44831	50773	57329	64539	72448
	Power (kW)	2.54	2.81	3.09	3.38	3.66	3.94	4.21	4.48	4.74	4.99	5.22	5.44	5.64	5.82
	EER (BTU/WATT-HR)	4.66	5.04	5.42	5.82	6.24	6.69	7.18	7.73	8.33	8.99	9.73	10.54	11.45	12.45
	Current (AMPS)	4.81	5.1	5.41	5.71	6.02	6.33	6.64	6.95	7.25	7.54	7.82	8.1	8.35	8.6

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR820	6.5	20	4	1 3/8	7/8	260	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

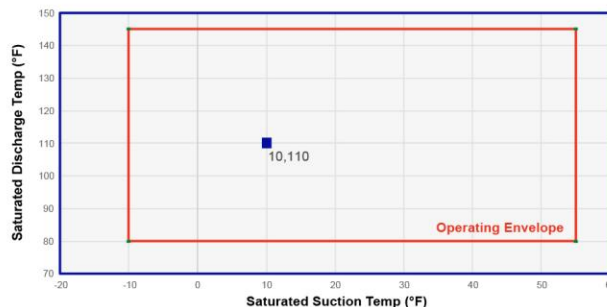


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	20361	23802	27639	31909	36651	41903	47701	54085	61092	68761	77129	86234	96115	106808
	Power (kW)	2.66	2.85	3.03	3.2	3.36	3.52	3.66	3.78	3.89	3.98	4.04	4.09	4.11	4.1
	EER (BTU/WATT-HR)	7.65	8.36	9.13	9.97	10.9	11.92	13.05	14.31	15.71	17.29	19.08	21.09	23.4	26.05
	Current (AMPS)	5.75	5.9	6.04	6.18	6.32	6.45	6.57	6.68	6.78	6.86	6.92	6.97	6.99	6.99
110	Capacity (Btu/hr)	16336	19459	22906	26715	30925	35572	40696	46334	52523	59303	66711	74784	83562	93081
	Power (kW)	2.79	3.03	3.27	3.51	3.74	3.97	4.18	4.39	4.58	4.75	4.91	5.05	5.16	5.26
	EER (BTU/WATT-HR)	5.85	6.41	7	7.61	8.26	8.97	9.73	10.57	11.48	12.49	13.59	14.82	16.19	17.71
	Current (AMPS)	6.01	6.14	6.29	6.46	6.63	6.82	7.02	7.23	7.44	7.65	7.87	8.08	8.3	8.5
130	Capacity (Btu/hr)	12471	15262	18305	21640	25303	29333	33767	38645	44003	49880	56313	63341	71002	79333
	Power (kW)	2.79	3.1	3.4	3.71	4.01	4.31	4.6	4.89	5.16	5.42	5.67	5.91	6.13	6.32
	EER (BTU/WATT-HR)	4.46	4.93	5.38	5.84	6.31	6.81	7.34	7.91	8.53	9.2	9.92	10.72	11.59	12.55
	Current (AMPS)	6.01	6.18	6.38	6.61	6.88	7.17	7.5	7.84	8.22	8.61	9.02	9.46	9.9	10.36

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR725	6.5	23.9	6	1 3/8	7/8	310	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

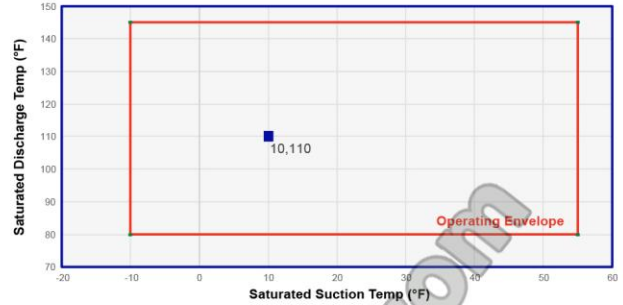

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	21906	26197	31017	36417	42451	49171	56630	64880	73974	83964	94904	106845	119840	133943
	Power (kW)	2.78	3.03	3.29	3.54	3.78	4.02	4.25	4.47	4.69	4.89	5.08	5.26	5.42	5.57
	EER (BTU/WATT-HR)	7.88	8.63	9.43	10.29	11.22	12.23	13.32	14.5	15.78	17.17	18.68	20.32	22.1	24.03
	Current (AMPS)	5.89	6.2	6.48	6.74	6.97	7.17	7.36	7.53	7.68	7.82	7.94	8.05	8.15	8.25
110	Capacity (Btu/hr)	16219	20042	24293	29024	34289	40140	46629	53809	61733	70453	80022	90493	101917	114348
	Power (kW)	2.81	3.14	3.48	3.81	4.13	4.46	4.77	5.08	5.38	5.67	5.95	6.22	6.48	6.72
	EER (BTU/WATT-HR)	5.77	6.37	6.99	7.62	8.29	9.01	9.77	10.59	11.47	12.42	13.44	14.54	15.73	17.01
	Current (AMPS)	5.95	6.33	6.67	6.99	7.27	7.52	7.75	7.96	8.14	8.31	8.45	8.58	8.7	8.8
130	Capacity (Btu/hr)	10907	14266	17953	22021	26521	31507	37032	43147	49906	57360	65564	74568	84426	95191
	Power (kW)	2.63	3.05	3.48	3.9	4.32	4.73	5.14	5.55	5.95	6.34	6.72	7.09	7.45	7.8
	EER (BTU/WATT-HR)	4.15	4.67	5.16	5.65	6.14	6.66	7.2	7.78	8.39	9.05	9.76	10.52	11.33	12.21
	Current (AMPS)	5.83	6.28	6.69	7.06	7.4	7.71	7.99	8.23	8.45	8.65	8.82	8.97	9.11	9.22

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR228	7.5	28	6	1 5/8	7/8	315	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

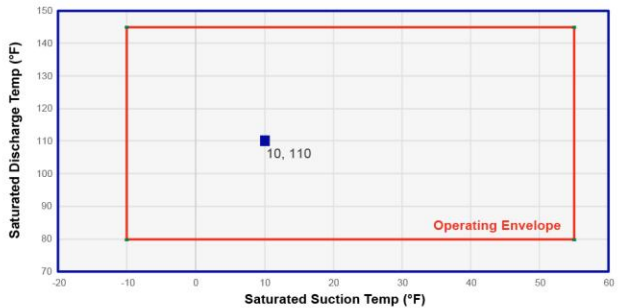

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	28277	33009	38248	44043	50442	57493	65244	73744	83040	93182	104216	116192	129158	143162
	Power (kW)	3.7	3.96	4.22	4.46	4.68	4.89	5.08	5.26	5.41	5.53	5.64	5.71	5.76	5.77
	EER (BTU/WATT-HR)	7.64	8.33	9.07	9.88	10.77	11.75	12.83	14.03	15.36	16.84	18.49	20.35	22.44	24.81
	Current (AMPS)	8.68	8.99	9.27	9.52	9.74	9.95	10.12	10.28	10.41	10.52	10.61	10.68	10.73	10.76
110	Capacity (Btu/hr)	22692	27058	31842	37092	42857	49184	56121	63718	72022	81081	90944	101659	113274	125838
	Power (kW)	3.88	4.24	4.59	4.93	5.26	5.57	5.87	6.15	6.41	6.65	6.87	7.06	7.23	7.37
	EER (BTU/WATT-HR)	5.85	6.38	6.94	7.53	8.15	8.83	9.56	10.36	11.23	12.19	13.24	14.39	15.67	17.08
	Current (AMPS)	8.91	9.29	9.65	9.98	10.29	10.57	10.83	11.06	11.27	11.47	11.64	11.79	11.92	12.03
130	Capacity (Btu/hr)	17123	21092	25389	30063	35162	40733	46826	53488	60768	68714	77374	86797	97029	108121
	Power (kW)	3.83	4.3	4.76	5.21	5.65	6.08	6.5	6.91	7.29	7.66	8.01	8.33	8.63	8.91
	EER (BTU/WATT-HR)	4.47	4.91	5.34	5.77	6.22	6.69	7.2	7.75	8.33	8.97	9.66	10.42	11.24	12.13
	Current (AMPS)	8.89	9.36	9.81	10.23	10.63	11	11.35	11.67	11.98	12.26	12.53	12.77	12.99	13.2

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR337	10	37.1	6	1 5/8	1 1/8	325	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

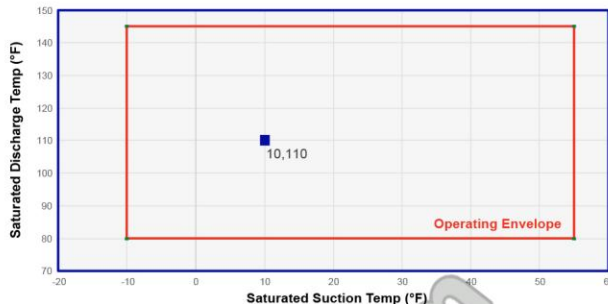

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	39462	45776	52701	60302	68638	77773	87768	98686	110587	123534	137590	152815	169271	187022
	Power (kW)	5.11	5.44	5.76	6.06	6.34	6.61	6.86	7.09	7.3	7.5	7.68	7.85	7.99	8.12
	EER (BTU/WATT-HR)	7.72	8.41	9.16	9.96	10.83	11.77	12.8	13.92	15.14	16.47	17.91	19.48	21.19	23.04
	Current (AMPS)	8.78	9.33	9.81	10.24	10.61	10.94	11.22	11.47	11.69	11.88	12.06	12.22	12.37	12.52
110	Capacity (Btu/hr)	32180	38160	44636	51669	59323	67659	76738	86623	97375	109058	121731	135458	150300	166320
	Power (kW)	5.45	5.91	6.35	6.77	7.17	7.56	7.93	8.28	8.61	8.93	9.22	9.5	9.75	9.99
	EER (BTU/WATT-HR)	5.9	6.46	7.03	7.63	8.27	8.95	9.68	10.46	11.31	12.22	13.2	14.26	15.41	16.64
	Current (AMPS)	9.25	9.94	10.56	11.1	11.57	11.98	12.33	12.63	12.88	13.08	13.26	13.4	13.51	13.61
130	Capacity (Btu/hr)	24516	30125	36113	42542	49476	56974	65100	73915	83481	93860	105114	117305	130495	144746
	Power (kW)	5.53	6.13	6.71	7.28	7.82	8.35	8.86	9.35	9.82	10.27	10.71	11.12	11.51	11.88
	EER (BTU/WATT-HR)	4.43	4.91	5.38	5.85	6.32	6.82	7.35	7.9	8.5	9.14	9.82	10.55	11.34	12.18
	Current (AMPS)	9.48	10.3	11.02	11.65	12.19	12.66	13.04	13.36	13.62	13.81	13.96	14.05	14.1	14.12

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR541	15	41	6	1 5/8	1 1/8	325	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

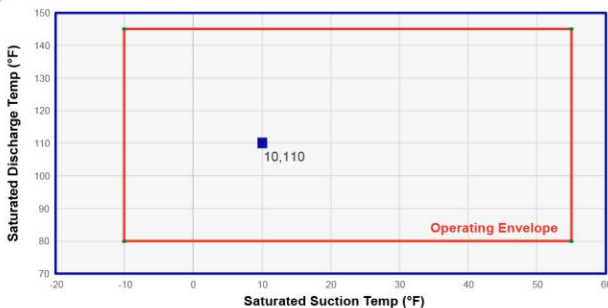

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	43729	50724	58399	66821	76059	86181	97257	109354	122542	136889	152464	169335	187571	207240
	Power (kW)	5.66	6.03	6.38	6.71	7.02	7.32	7.6	7.85	8.09	8.31	8.51	8.69	8.85	8.99
	EER (BTU/WATT-HR)	7.72	8.41	9.16	9.96	10.83	11.77	12.8	13.92	15.14	16.47	17.91	19.48	21.19	23.04
	Current (AMPS)	9.86	10.26	10.79	11.26	11.67	12.03	12.34	12.62	12.86	13.07	13.26	13.44	13.61	13.77
110	Capacity (Btu/hr)	35659	42285	49461	57255	65736	74973	85034	95988	107903	120848	134891	150102	166549	184300
	Power (kW)	6.04	6.55	7.03	7.5	7.95	8.38	8.79	9.17	9.54	9.89	10.22	10.52	10.81	11.07
	EER (BTU/WATT-HR)	5.9	6.46	7.03	7.63	8.27	8.95	9.68	10.46	11.31	12.22	13.2	14.26	15.41	16.64
	Current (AMPS)	10.17	10.94	11.62	12.21	12.73	13.18	13.56	13.89	14.16	14.39	14.58	14.74	14.86	14.97
130	Capacity (Btu/hr)	27167	33382	40017	47142	54824	63133	72138	81906	92506	104007	116478	129987	144603	160394
	Power (kW)	6.13	6.79	7.44	8.06	8.67	9.25	9.82	10.36	10.88	11.38	11.86	12.32	12.75	13.16
	EER (BTU/WATT-HR)	4.43	4.91	5.38	5.85	6.32	6.82	7.35	7.9	8.5	9.14	9.82	10.55	11.34	12.18
	Current (AMPS)	10.43	11.33	12.12	12.81	13.41	13.92	14.35	14.7	14.98	15.19	15.35	15.46	15.52	15.53

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR337	10	37.1	6	1 5/8	1 1/8	325	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

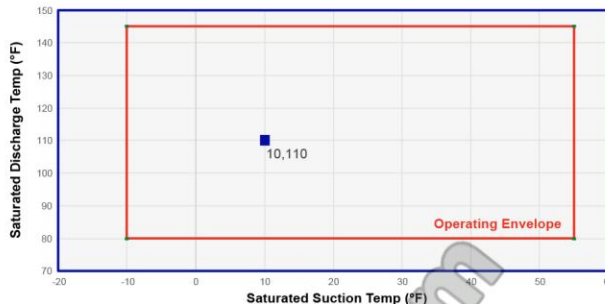

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	39462	45776	52701	60302	68638	77773	87768	98686	110587	123534	137590	152815	169271	187022
	Power (kW)	5.11	5.44	5.76	6.06	6.34	6.61	6.86	7.09	7.3	7.5	7.68	7.85	7.99	8.12
	EER (BTU/WATT-HR)	7.72	8.41	9.16	9.96	10.83	11.77	12.8	13.92	15.14	16.47	17.91	19.48	21.19	23.04
	Current (AMPS)	8.78	9.33	9.81	10.24	10.61	10.94	11.22	11.47	11.69	11.88	12.06	12.22	12.37	12.52
110	Capacity (Btu/hr)	32180	38160	44636	51669	59323	67659	76738	86623	97375	109058	121731	135458	150300	166320
	Power (kW)	5.45	5.91	6.35	6.77	7.17	7.56	7.93	8.28	8.61	8.93	9.22	9.5	9.75	9.99
	EER (BTU/WATT-HR)	5.9	6.46	7.03	7.63	8.27	8.95	9.68	10.46	11.31	12.22	13.2	14.26	15.41	16.64
	Current (AMPS)	9.25	9.94	10.56	11.1	11.57	11.98	12.33	12.63	12.88	13.08	13.26	13.4	13.51	13.61
130	Capacity (Btu/hr)	24516	30125	36113	42542	49476	56974	65100	73915	83481	93860	105114	117305	130495	144746
	Power (kW)	5.53	6.13	6.71	7.28	7.82	8.35	8.86	9.35	9.82	10.27	10.71	11.12	11.51	11.88
	EER (BTU/WATT-HR)	4.43	4.91	5.38	5.85	6.32	6.82	7.35	7.9	8.5	9.14	9.82	10.55	11.34	12.18
	Current (AMPS)	9.48	10.3	11.02	11.65	12.19	12.66	13.04	13.36	13.62	13.81	13.96	14.05	14.1	14.12

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR541	15	41	6	1 5/8	1 1/8	325	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

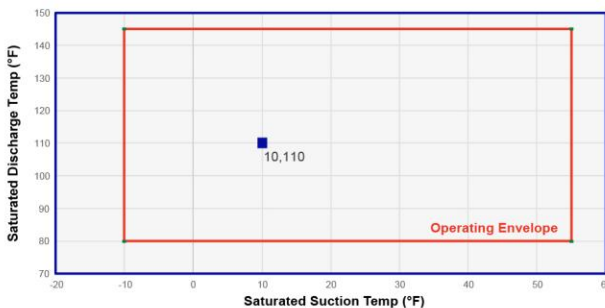

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)													
		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	43729	50724	58399	66821	76059	86181	97257	109354	122542	136889	152464	169335	187571	207240
	Power (kW)	5.66	6.03	6.38	6.71	7.02	7.32	7.6	7.85	8.09	8.31	8.51	8.69	8.85	8.99
	EER (BTU/WATT-HR)	7.72	8.41	9.16	9.96	10.83	11.77	12.8	13.92	15.14	16.47	17.91	19.48	21.19	23.04
	Current (AMPS)	9.66	10.26	10.79	11.26	11.67	12.03	12.34	12.62	12.86	13.07	13.26	13.44	13.61	13.77
110	Capacity (Btu/hr)	35659	42285	49461	57255	65736	74973	85034	95988	107903	120848	134891	150102	166549	184300
	Power (kW)	6.04	6.55	7.03	7.5	7.95	8.38	8.79	9.17	9.54	9.89	10.22	10.52	10.81	11.07
	EER (BTU/WATT-HR)	5.9	6.46	7.03	7.63	8.27	8.95	9.68	10.46	11.31	12.22	13.2	14.26	15.41	16.64
	Current (AMPS)	10.17	10.94	11.62	12.21	12.73	13.18	13.56	13.89	14.16	14.39	14.58	14.74	14.86	14.97
130	Capacity (Btu/hr)	27167	33382	40017	47142	54824	63133	72138	81906	92506	104007	116478	129987	144603	160394
	Power (kW)	6.13	6.79	7.44	8.06	8.67	9.25	9.82	10.36	10.88	11.38	11.86	12.32	12.75	13.16
	EER (BTU/WATT-HR)	4.43	4.91	5.38	5.85	6.32	6.82	7.35	7.9	8.5	9.14	9.82	10.55	11.34	12.18
	Current (AMPS)	10.43	11.33	12.12	12.81	13.41	13.92	14.35	14.7	14.98	15.19	15.35	15.46	15.52	15.53

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR316	5	15.9	4	1 1/8	5/8	235	4 1/2


Available Voltages
208/230-3-60
460-3-60
575-3-60

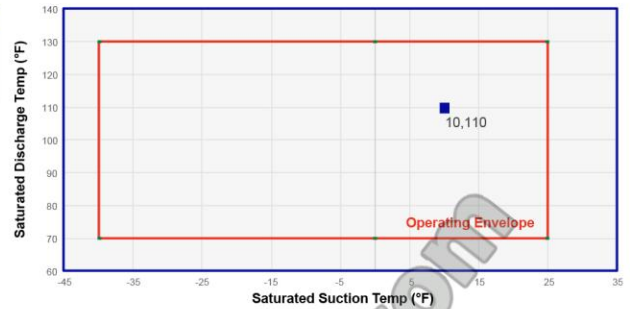

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	31813	36341	41270	46619	52407	58656	65384	72611						
	Power (kW)	4	4.21	4.41	4.61	4.78	4.95	5.1	5.23						
	EER (BTU/WATT-HR)	7.96	8.63	9.35	10.12	10.96	11.86	12.83	13.88						
	Current (AMPS)	6.39	6.64	6.86	7.07	7.25	7.41	7.54	7.65						
110	Capacity (Btu/hr)	26084	30002	34276	38925	43969	49428	55320	61668						
	Power (kW)	4.4	4.68	4.96	5.23	5.48	5.72	5.95	6.16						
	EER (BTU/WATT-HR)	5.93	6.4	6.91	7.45	8.02	8.64	9.3	10.02						
	Current (AMPS)	6.86	7.18	7.49	7.77	8.03	8.27	8.48	8.66						
130	Capacity (Btu/hr)	19953	23206	26767	30656	34894	39498	44490	49889						
	Power (kW)	4.69	5.06	5.42	5.77	6.11	6.43	6.74	7.04						
	EER (BTU/WATT-HR)	4.26	4.59	4.94	5.31	5.71	6.14	6.6	7.09						
	Current (AMPS)	7.19	7.6	8	8.37	8.72	9.04	9.33	9.6						

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR820	6.5	20	4	1 3/8	7/8	260	5 1/2

Available Voltages
208/230-3-60
460-3-60
575-3-60

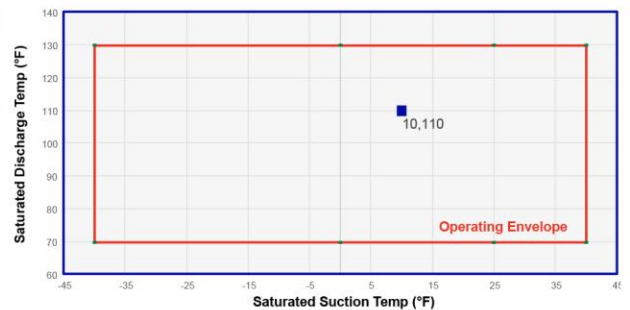

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	42781	48728	55194	61996	69658	77968	86974	96722	107261	118638				
	Power (kW)	5.24	5.52	5.79	6.08	6.28	6.46	6.61	6.73	6.83	6.91				
	EER (BTU/WATT-HR)	8.16	8.82	9.54	10.2	11.09	12.07	13.16	14.37	15.7	17.17				
	Current (AMPS)	8.47	8.78	9.09	9.5	9.73	9.94	10.14	10.3	10.41	10.46				
110	Capacity (Btu/hr)	35383	40544	46168	52151	58790	65960	73709	82084	91133	100903				
	Power (kW)	5.75	6.13	6.49	6.89	7.22	7.52	7.8	8.04	8.26	8.46				
	EER (BTU/WATT-HR)	6.15	6.62	7.12	7.57	8.14	8.77	9.45	10.2	11.03	11.93				
	Current (AMPS)	9.03	9.46	9.9	10.4	10.76	11.12	11.48	11.81	12.11	12.36				
130	Capacity (Btu/hr)	27398	31694	36392	41215	46669	52536	58861	65692	73077	81063				
	Power (kW)	6.11	6.58	7.04	7.47	7.95	8.41	8.84	9.23	9.6	9.94				
	EER (BTU/WATT-HR)	4.49	4.82	5.17	5.52	5.87	6.25	6.66	7.11	7.61	8.16				
	Current (AMPS)	9.45	10.01	10.58	11.09	11.64	12.2	12.77	13.33	13.87	14.37				

06DR725


R404A/R507 Refrigerants

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR725	6.5	23.9	6	1 3/8	7/8	310	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

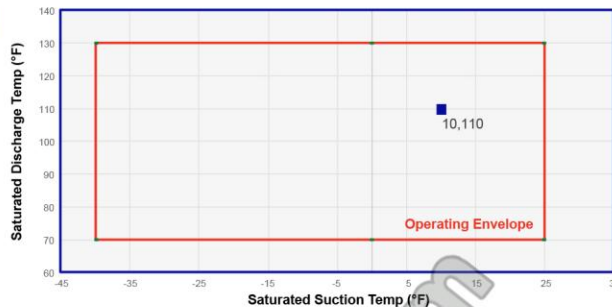

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	47056	53796	61116	70355	79696	89905	101045	113177						
	Power (kW)	5.93	6.31	6.68	7.05	7.32	7.57	7.79	7.97						
	EER (BTU/WATT-HR)	7.94	8.53	9.15	9.98	10.88	11.87	12.97	14.19						
	Current (AMPS)	9.2	9.64	10.09	11.4	11.81	12.14	12.42	12.63						
110	Capacity (Btu/hr)	38397	44261	50643	57819	65728	74347	83738	93963						
	Power (kW)	6.33	6.81	7.29	7.84	8.29	8.7	9.08	9.41						
	EER (BTU/WATT-HR)	6.07	6.5	6.95	7.38	7.93	8.54	9.22	9.98						
	Current (AMPS)	9.66	10.24	10.83	12.43	13.02	13.51	13.93	14.27						
130	Capacity (Btu/hr)	29132	34026	39371	44629	50977	57874	65381	73560						
	Power (kW)	6.53	7.13	7.72	8.25	8.91	9.53	10.11	10.63						
	EER (BTU/WATT-HR)	4.46	4.77	5.1	5.41	5.72	6.07	6.47	6.92						
	Current (AMPS)	9.92	10.64	11.39	12.98	13.69	14.31	14.82	15.26						

06DR228


R404A/R507 Refrigerants

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR228	7.5	28	6	1 5/8	7/8	315	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

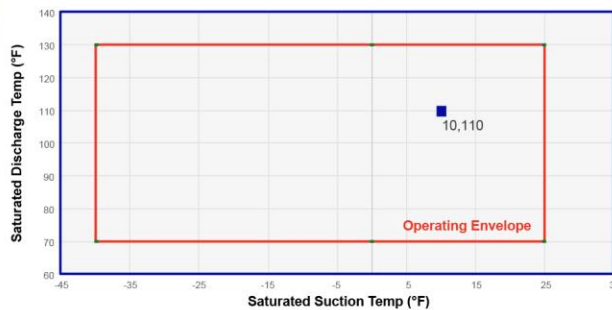


Tabular Data Summary

Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	58164	65789	74010	85607	96399	108150	120932	134818	149878					
	Power (kW)	7.2	7.54	7.83	8.62	8.93	9.21	9.45	9.65	9.81					
	EER (BTU/WATT-HR)	8.07	8.73	9.46	9.93	10.79	11.75	12.8	13.97	15.28					
	Current (AMPS)	12.42	12.83	13.18	13.61	14.1	14.61	15.11	15.56	15.93					
110	Capacity (Btu/hr)	49876	55680	63005	71637	80883	90910	101789	113592	126391					
	Power (kW)	7.97	8.49	8.96	9.65	10.16	10.63	11.06	11.44	11.79					
	EER (BTU/WATT-HR)	6.13	6.56	7.03	7.42	7.96	8.56	9.21	9.93	10.72					
	Current (AMPS)	13.37	13.96	14.49	15.65	16.73	17.87	19.05	20.22	21.34					
130	Capacity (Btu/hr)	38215	44084	50399	56420	63940	72058	80845	90372	100712					
	Power (kW)	8.41	9.12	9.8	10.32	11.06	11.75	12.4	13.01	13.57					
	EER (BTU/WATT-HR)	4.54	4.83	5.14	5.47	5.78	6.13	6.52	6.95	7.42					
	Current (AMPS)	13.87	14.67	15.4	17.06	19.15	21.34	23.6	25.89	28.19					

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR337	10	37.1	6	1 5/8	1 1/8	325	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

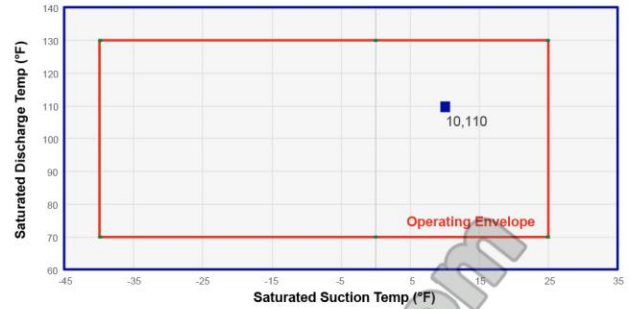

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	77514	87951	99448	113438	127721	143270	160182	178554						
	Power (kW)	9.85	10.47	11.07	11.42	11.83	12.2	12.52	12.78						
	EER (BTU/WATT-HR)	7.87	8.4	8.98	9.93	10.79	11.74	12.8	13.97						
	Current (AMPS)	14.55	15.33	16.14	17.03	17.76	18.41	18.97	19.44						
110	Capacity (Btu/hr)	63193	71823	81363	94900	107100	120361	134779	150451						
	Power (kW)	10.71	11.47	12.24	12.79	13.46	14.08	14.65	15.16						
	EER (BTU/WATT-HR)	5.9	6.26	6.65	7.42	7.96	8.55	9.2	9.92						
	Current (AMPS)	15.64	16.65	17.73	18.41	19.43	20.41	21.32	22.16						
130	Capacity (Btu/hr)	49029	55833	63393	74787	84733	95527	107267	120049						
	Power (kW)	11.38	12.28	13.19	13.68	14.65	15.57	16.42	17.22						
	EER (BTU/WATT-HR)	4.31	4.55	4.81	5.47	5.78	6.14	6.53	6.97						
	Current (AMPS)	16.54	17.78	19.11	19.4	20.65	21.88	23.08	24.24						

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR541	15	41	6	1 5/8	1 1/8	325	8

Available Voltages
208/230-3-60
460-3-60
575-3-60

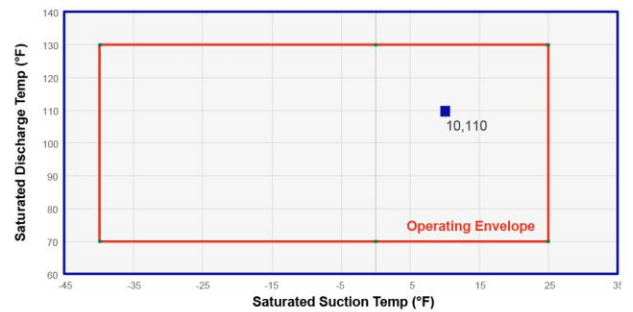

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)	86072	97732	110583	124705	140175	157071	175471	195454	217097					
	Power (kW)	11.13	11.75	12.35	12.94	13.51	14.06	14.57	15.05	15.48					
	EER (BTU/WATT-HR)	7.74	8.32	8.95	9.63	10.37	11.17	12.04	12.99	14.02					
	Current (AMPS)	17.9	18.49	19.05	19.6	20.14	20.65	21.14	21.61	22.06					
110	Capacity (Btu/hr)	70070	79724	90368	102080	114938	129021	144407	161174	179399					
	Power (kW)	12.07	12.84	13.61	14.38	15.14	15.88	16.61	17.3	17.97					
	EER (BTU/WATT-HR)	5.81	6.21	6.64	7.1	7.59	8.12	8.7	9.31	9.98					
	Current (AMPS)	18.79	19.51	20.23	20.95	21.67	22.38	23.09	23.78	24.47					
130	Capacity (Btu/hr)	54141	61708	70058	79269	89419	100586	112847	126280	140963					
	Power (kW)	12.82	13.74	14.67	15.6	16.54	17.47	18.4	19.31	20.21					
	EER (BTU/WATT-HR)	4.22	4.49	4.78	5.08	5.41	5.76	6.13	6.54	6.98					
	Current (AMPS)	19.49	20.36	21.24	22.13	23.03	23.94	24.85	25.78	26.71					

06DM808


R404A/R507 Refrigerants

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DM808	3	8	2	7/8	5/8	160	3

Available Voltages

208/230-3-60
460-3-60
575-3-60

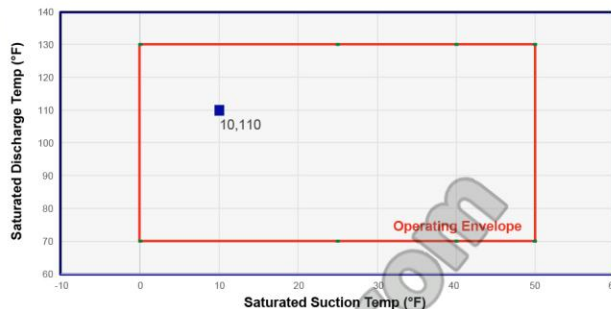

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)				21727	24869	28315	32088	36208	40699	45581	50877	56610	62800	
	Power (kW)				2.48	2.59	2.68	2.75	2.82	2.88	2.93	2.96	2.99	3.01	
	EER (BTU/WATT-HR)				8.74	9.62	10.59	11.65	12.83	14.14	15.58	17.17	18.93	20.87	
	Current (AMPS)				5.61	5.86	6.09	6.29	6.46	6.6	6.71	6.78	6.82	6.82	
110	Capacity (Btu/hr)				17244	19875	22754	25903	29344	33098	37189	41637	46466	51696	
	Power (kW)				2.64	2.79	2.93	3.06	3.18	3.3	3.4	3.49	3.58	3.66	
	EER (BTU/WATT-HR)				6.54	7.13	7.76	8.46	9.22	10.04	10.94	11.92	12.98	14.14	
	Current (AMPS)				5.99	6.36	6.71	7.03	7.31	7.56	7.78	7.95	8.09	8.18	
130	Capacity (Btu/hr)				12716	14802	17078	19566	22289	25267	28524	32080	35959	40180	
	Power (kW)				2.66	2.87	3.07	3.26	3.44	3.62	3.78	3.94	4.09	4.23	
	EER (BTU/WATT-HR)				4.78	5.16	5.56	6	6.47	6.99	7.55	8.15	8.8	9.5	
	Current (AMPS)				6.07	6.57	7.03	7.46	7.86	8.22	8.54	8.82	9.05	9.24	

06DM313


R404A/R507 Refrigerants

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DM313	5	13	4	7/8	5/8	235	4 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

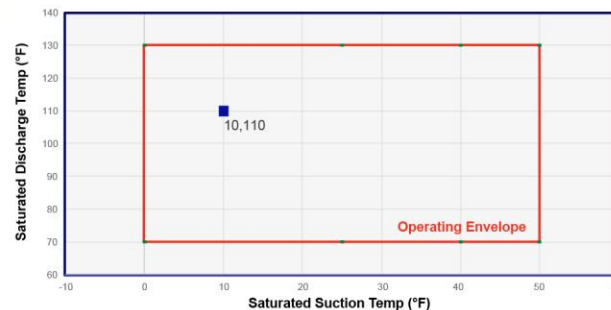

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50
90	Capacity (Btu/hr)				33740	38970	44659	50841	57548	64814	72671	81152	90290	100118
	Power (kW)				3.36	3.54	3.7	3.85	3.99	4.12	4.23	4.32	4.41	4.49
	EER (BTU/WATT-HR)				10.03	11.01	12.05	13.19	14.42	15.75	17.2	18.77	20.47	22.32
	Current (AMPS)				5.37	5.57	5.76	5.94	6.11	6.27	6.42	6.56	6.69	6.82
110	Capacity (Btu/hr)				25668	30154	35017	40291	46008	52201	58904	66149	73970	82399
	Power (kW)				3.57	3.84	4.08	4.31	4.53	4.73	4.91	5.08	5.24	5.38
	EER (BTU/WATT-HR)				7.18	7.86	8.58	9.34	10.16	11.04	11.99	13.02	14.13	15.33
	Current (AMPS)				5.61	5.92	6.22	6.52	6.82	7.12	7.41	7.71	8	8.29
130	Capacity (Btu/hr)				17435	21076	25012	29273	33893	38905	44342	50236	56620	63527
	Power (kW)				3.56	3.93	4.28	4.61	4.92	5.21	5.49	5.75	5.99	6.21
	EER (BTU/WATT-HR)				4.89	5.36	5.85	6.35	6.89	7.46	8.08	8.74	9.45	10.22
	Current (AMPS)				5.59	6.05	6.51	6.98	7.45	7.93	8.41	8.9	9.4	9.9

06DM316


R404A/R507 Refrigerants

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DM316	5	15.9	4	1 1/8	5/8	235	4 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

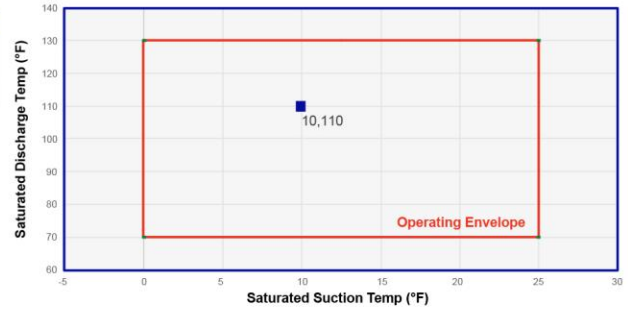

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50
90	Capacity (Btu/hr)				43564	50217	57564	65662	74568					
	Power (kW)				4.58	4.78	4.95	5.1	5.23					
	EER (BTU/WATT-HR)				9.51	10.51	11.62	12.86	14.26					
	Current (AMPS)				6.91	7.16	7.39	7.58	7.75					
110	Capacity (Btu/hr)				33855	39329	45353	51982	59272					
	Power (kW)				4.89	5.21	5.5	5.75	5.98					
	EER (BTU/WATT-HR)				6.93	7.56	8.25	9.03	9.91					
	Current (AMPS)				7.35	7.76	8.14	8.51	8.85					
130	Capacity (Btu/hr)				24418	28694	33372	38505	44152					
	Power (kW)				4.88	5.33	5.75	6.13	6.46					
	EER (BTU/WATT-HR)				5	5.38	5.81	6.29	6.83					
	Current (AMPS)				7.26	7.89	8.51	9.11	9.69					

06DM337


R404A/R507 Refrigerants

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DM337	10	37.1	6	1 5/8	1 1/8	325	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

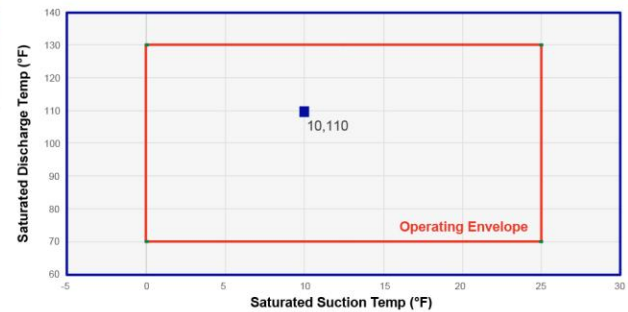

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)				107331	121591	137215	154314	173000						
	Power (kW)				11.13	11.59	12.03	12.44	12.79						
	EER (BTU/WATT-HR)				9.65	10.49	11.4	12.41	13.52						
	Current (AMPS)				17.03	17.76	18.41	18.97	19.44						
110	Capacity (Btu/hr)				88225	100183	113266	127585	143252						
	Power (kW)				12.63	13.35	14.04	14.69	15.29						
	EER (BTU/WATT-HR)				6.99	7.5	8.07	8.69	9.37						
	Current (AMPS)				18.41	19.43	20.41	21.32	22.16						
130	Capacity (Btu/hr)				68379	77973	88446	99909	112476						
	Power (kW)				13.28	14.29	15.26	16.19	17.07						
	EER (BTU/WATT-HR)				5.15	5.46	5.8	6.17	6.59						
	Current (AMPS)				19.4	20.65	21.88	23.08	24.24						

06DA818


R404A/R507 Refrigerants

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DA818	6.5	18.3	4	1 1/8	7/8	250	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

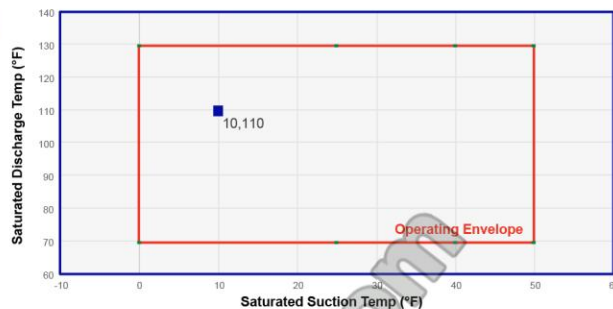

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50
90	Capacity (Btu/hr)				50119	57269	65036	73462	82586	92447	103084	114538	126849	140055
	Power (kW)				5.37	5.58	5.75	5.88	5.96	6.01	6	5.94	5.82	5.65
	EER (BTU/WATT-HR)				9.33	10.27	11.32	12.5	13.85	15.39	17.19	19.29	21.79	24.8
	Current (AMPS)				8.34	8.54	8.71	8.85	8.95	9	9	8.93	8.79	8.57
110	Capacity (Btu/hr)				39298	45474	52198	59509	67447	76052	85363	95421	106265	117934
	Power (kW)				5.91	6.26	6.58	6.87	7.11	7.32	7.48	7.59	7.65	7.66
	EER (BTU/WATT-HR)				6.64	7.26	7.93	8.66	9.48	10.39	11.41	12.57	13.88	15.39
	Current (AMPS)				8.9	9.26	9.61	9.94	10.25	10.51	10.73	10.91	11.02	11.06
130	Capacity (Btu/hr)				27574	32576	38052	44042	50585	57720	65487	73926	83076	92975
	Power (kW)				6.16	6.67	7.15	7.6	8.01	8.39	8.73	9.03	9.28	9.48
	EER (BTU/WATT-HR)				4.47	4.88	5.32	5.8	6.31	6.88	7.5	8.19	8.95	9.81
	Current (AMPS)				9.14	9.76	10.38	10.99	11.58	12.15	12.69	13.19	13.64	14.04

06DA825


R404A/R507 Refrigerants

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DA825	7.5	23.9	6	1 3/8	1 1/8	315	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

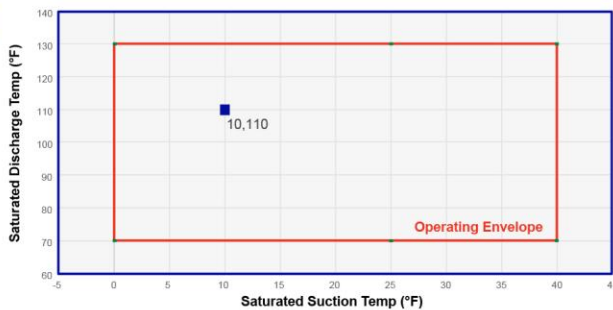


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)				64123	73622	83987	95275	107543	120847	135245	150793			
	Power (kW)				6.93	7.2	7.43	7.62	7.75	7.83	7.86	7.83			
	EER (BTU/WATT-HR)				9.26	10.22	11.3	12.51	13.87	15.43	17.2	19.26			
	Current (AMPS)				10.59	10.91	11.18	11.4	11.56	11.66	11.69	11.65			
110	Capacity (Btu/hr)				49683	57779	66635	76308	86853	98330	110793	124300			
	Power (kW)				7.64	8.09	8.5	8.88	9.2	9.48	9.71	9.88			
	EER (BTU/WATT-HR)				6.51	7.14	7.84	8.6	9.44	10.37	11.41	12.58			
	Current (AMPS)				11.44	11.97	12.47	12.92	13.32	13.68	13.97	14.2			
130	Capacity (Btu/hr)				34252	40707	47811	55620	64192	73582	83848	95046			
	Power (kW)				7.98	8.63	9.25	9.83	10.37	10.86	11.31	11.7			
	EER (BTU/WATT-HR)				4.29	4.72	5.17	5.66	6.19	6.77	7.41	8.12			
	Current (AMPS)				11.79	12.61	13.4	14.15	14.87	15.55	16.18	16.76			

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DA328	10	28	6	1 3/8	1 1/8	315	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

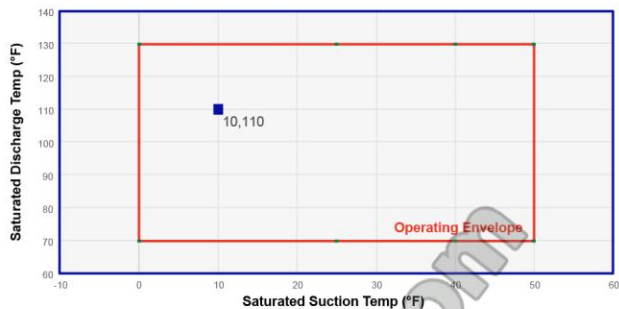

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)				77486	88232	100035	112974	127127	142572	159386	177648	197437	218829	
	Power (kW)				8.34	8.62	8.86	9.04	9.18	9.24	9.24	9.16	9	8.76	
	EER (BTU/WATT-HR)				9.29	10.24	11.29	12.49	13.86	15.43	17.25	19.39	21.93	24.99	
	Current (AMPS)				12.43	12.79	13.1	13.34	13.5	13.58	13.47	13.26	12.94		
110	Capacity (Btu/hr)				62314	71343	81272	92177	104137	117230	131534	147128	164090	182498	
	Power (kW)				9.39	9.85	10.27	10.65	10.98	11.27	11.5	11.67	11.77	11.79	
	EER (BTU/WATT-HR)				6.63	7.25	7.92	8.66	9.48	10.4	11.44	12.61	13.94	15.48	
	Current (AMPS)				13.73	14.31	14.84	15.33	15.76	16.12	16.42	16.64	16.77	16.8	
130	Capacity (Btu/hr)				45704	52844	60719	69407	78985	89531	101124	113840	127758	142954	
	Power (kW)				10.23	10.85	11.44	12.01	12.55	13.05	13.51	13.91	14.26	14.55	
	EER (BTU/WATT-HR)				4.47	4.87	5.31	5.78	6.29	6.86	7.49	8.18	8.96	9.83	
	Current (AMPS)				14.83	15.62	16.39	17.13	17.83	18.49	19.1	19.64	20.12	20.53	

Physical Data							
Model	Nominal HP	Displ. CFM	No. of Cylinders	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DA537	15	37.1	6	1 5/8	1 1/8	325	8


Available Voltages
208/230-3-60
460-3-60
575-3-60

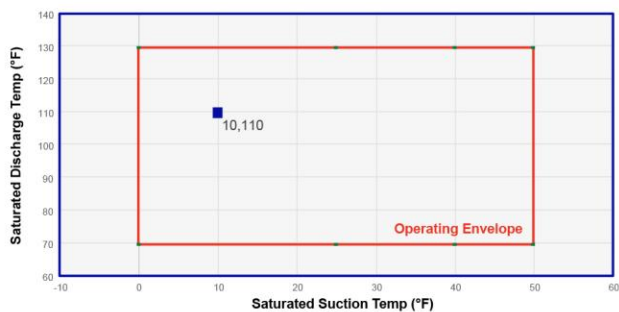

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz															
Saturated Condensing Temperature (F)		-10	-5	0	5	10	15	20	25	30	35	40	45	50	55
90	Capacity (Btu/hr)				106816	120788	136003	152544	170493	189932	210944	233610	258014	284237	
	Power (kW)				11.06	11.48	11.84	12.13	12.34	12.48	12.52	12.47	12.32	12.06	
	EER (BTU/WATT-HR)				9.66	10.52	11.49	12.58	13.81	15.22	16.85	18.73	20.95	23.58	
	Current (AMPS)				16.76	17.26	17.69	18.03	18.29	18.44	18.5	18.43	18.24	17.92	
110	Capacity (Btu/hr)				87383	99417	112543	126840	142393	159284	177594	197407	218805	241871	
	Power (kW)				12.72	13.38	14	14.56	15.07	15.5	15.86	16.13	16.31	16.4	
	EER (BTU/WATT-HR)				6.87	7.43	8.04	8.71	9.45	10.28	11.2	12.24	13.41	14.75	
	Current (AMPS)				18.74	19.54	20.28	20.97	21.58	22.12	22.57	22.93	23.18	23.32	
130	Capacity (Btu/hr)				65177	74924	85602	97294	110081	124046	139269	155834	173822	193314	
	Power (kW)				14.08	15	15.88	16.73	17.52	18.26	18.93	19.54	20.07	20.51	
	EER (BTU/WATT-HR)				4.63	5	5.39	5.82	6.28	6.79	7.36	7.98	8.66	9.43	
	Current (AMPS)				20.38	21.53	22.66	23.74	24.77	25.74	26.65	27.48	28.23	28.88	

Physical Data									
Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR109	3	8.7	2	2	1 3/8	7/8	5/8	190	3


Available Voltages
208/230-3-60
460-3-60
575-3-60

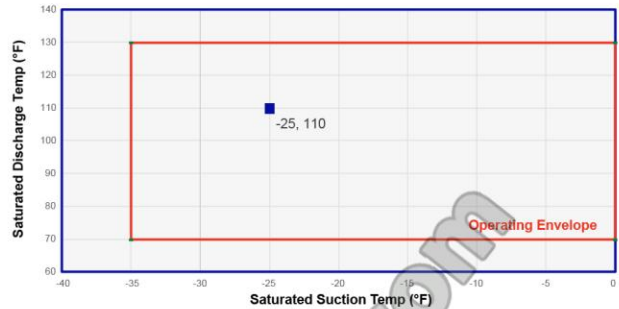

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz									
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)							
		-35	-30	-25	-20	-15	-10	-5	0
90	Capacity (Btu/hr)	5550	7143	8747	10438	12292	14383	16789	19584
	Power (kW)	1.34	1.46	1.59	1.73	1.88	2.02	2.17	2.31
	EER (BTU/WATT-HR)	4.16	4.9	5.5	6.03	6.55	7.11	7.74	8.47
	Current (AMPS)	2.25	2.37	2.52	2.7	2.89	3.09	3.3	3.52
110	Capacity (Btu/hr)	3576	5063	6557	8133	9866	11831	14105	16763
	Power (kW)	1.26	1.4	1.56	1.72	1.9	2.08	2.27	2.46
	EER (BTU/WATT-HR)	2.83	3.61	4.21	4.72	5.19	5.68	6.22	6.83
	Current (AMPS)	2.38	2.48	2.63	2.81	3.02	3.26	3.53	3.81
130	Capacity (Btu/hr)	1561	2934	4308	5759	7361	9192	11326	13839
	Power (kW)	1.19	1.34	1.52	1.71	1.91	2.12	2.34	2.57
	EER (BTU/WATT-HR)	1.31	2.18	2.84	3.38	3.86	4.33	4.84	5.39
	Current (AMPS)	2.16	2.24	2.37	2.55	2.78	3.06	3.37	3.71

Physical Data									
Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR013	3	13	4	2	1	1 1/8	5/8	230	4 1/2


Available Voltages
208/230-3-60
460-3-60
575-3-60

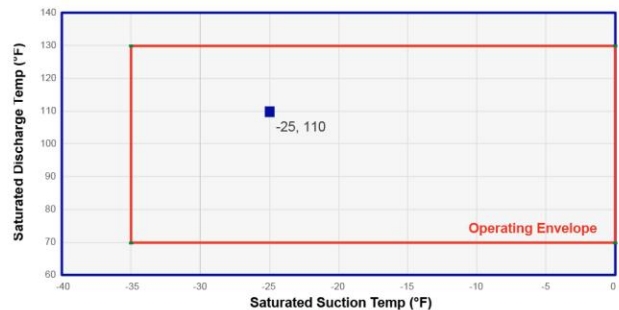

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz									
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)							
		-35	-30	-25	-20	-15	-10	-5	0
90	Capacity (Btu/hr)	8806	11041	13328	15758	18420	21404	24800	28697
	Power (kW)	1.85	2.02	2.2	2.4	2.6	2.8	3	3.18
	EER (BTU/WATT-HR)	4.76	5.48	6.06	6.57	7.08	7.63	8.27	9.03
	Current (AMPS)	2.96	3.15	3.38	3.64	3.92	4.22	4.53	4.85
110	Capacity (Btu/hr)	6294	8414	10573	12860	15366	18180	21391	25089
	Power (kW)	1.82	2	2.2	2.42	2.65	2.9	3.14	3.38
	EER (BTU/WATT-HR)	3.45	4.22	4.82	5.32	5.79	6.27	6.81	7.42
	Current (AMPS)	3.19	3.35	3.56	3.83	4.14	4.5	4.89	5.31
130	Capacity (Btu/hr)	3447	5454	7487	9634	11986	14633	17663	21167
	Power (kW)	1.86	2.02	2.22	2.45	2.71	2.98	3.26	3.54
	EER (BTU/WATT-HR)	1.86	2.7	3.37	3.93	4.43	4.91	5.42	5.98
	Current (AMPS)	3.01	3.11	3.29	3.55	3.88	4.28	4.73	5.24

Physical Data									
Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR316	5	15.9	4	2	1 1/4	1 1/8	5/8	235	4 1/2


Available Voltages
208/230-3-60
460-3-60
575-3-60

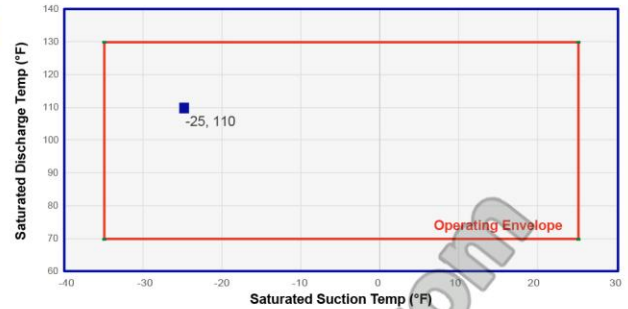

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz														
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)												
		-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25
90	Capacity (Btu/hr)	11094	13719	16411	19275	22420	25952	29979	34608	38125	42963	48151	53977	60728
	Power (kW)	2.3	2.48	2.7	2.93	3.17	3.42	3.66	3.88	4.06	4.18	4.25	4.28	4.28
	EER (BTU/WATT-HR)	4.83	5.52	6.09	6.58	7.07	7.6	8.2	8.92	9.4	10.28	11.33	12.62	14.2
	Current (AMPS)	4.19	4.35	4.54	4.76	5.02	5.33	5.7	6.14	6.49	6.94	7.38	7.84	8.34
110	Capacity (Btu/hr)	8327	10805	13334	16020	18971	22293	26093	30479	32470	36951	41577	46637	52415
	Power (kW)	2.35	2.54	2.76	3.01	3.29	3.57	3.87	4.16	4.38	4.6	4.75	4.84	4.88
	EER (BTU/WATT-HR)	3.54	4.26	4.83	5.32	5.77	6.24	6.75	7.33	7.42	8.03	8.75	9.64	10.73
	Current (AMPS)	4.51	4.65	4.83	5.07	5.38	5.77	6.24	6.82	7.52	8.27	9.08	9.97	10.97
130	Capacity (Btu/hr)	5209	7543	9911	12420	15179	18293	21870	26017	26846	30798	34682	38815	43452
	Power (kW)	2.53	2.69	2.9	3.16	3.44	3.75	4.07	4.4	4.69	5.03	5.28	5.45	5.55
	EER (BTU/WATT-HR)	2.06	2.8	3.41	3.94	4.41	4.88	5.37	5.91	5.73	6.12	6.58	7.13	7.83
	Current (AMPS)	4.32	4.43	4.61	4.89	5.26	5.74	6.33	7.04	8.21	9.26	10.42	11.73	13.22

Physical Data									
Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR718	5	18.3	4	2	1 7/16	1 3/8	7/8	250	5 1/2

Available Voltages
208/230-3-60
460-3-60
575-3-60

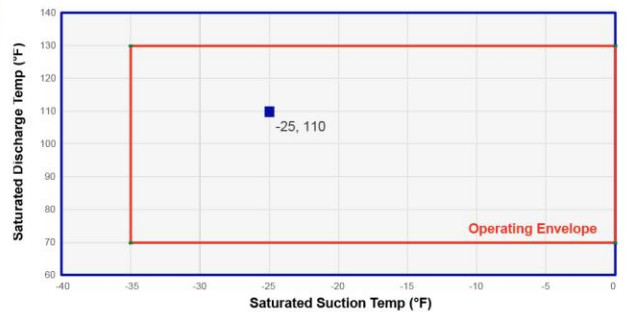


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz									
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)							
		-35	-30	-25	-20	-15	-10	-5	0
90	Capacity (Btu/hr)	13226	16161	19171	22377	25904	29872	34405	39625
	Power (kW)	2.69	2.9	3.14	3.4	3.67	3.95	4.22	4.47
	EER (BTU/WATT-HR)	4.91	5.57	6.11	6.59	7.06	7.57	8.16	8.86
	Current (AMPS)	4.38	4.62	4.92	5.26	5.64	6.05	6.47	6.9
110	Capacity (Btu/hr)	10361	13115	15927	18920	22217	25938	30208	35148
	Power (kW)	2.85	3.05	3.29	3.57	3.87	4.19	4.52	4.85
	EER (BTU/WATT-HR)	3.63	4.3	4.84	5.3	5.74	6.19	6.68	7.25
	Current (AMPS)	4.83	5.03	5.32	5.67	6.09	6.56	7.07	7.62
130	Capacity (Btu/hr)	7153	9727	12343	15123	18191	21667	25675	30337
	Power (kW)	3.21	3.37	3.58	3.85	4.15	4.48	4.84	5.21
	EER (BTU/WATT-HR)	2.23	2.89	3.44	3.93	4.38	4.83	5.31	5.83
	Current (AMPS)	4.93	5.07	5.32	5.66	6.09	6.59	7.17	7.8

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR820	6.5	20	4	2	1 9/16	1 3/8	7/8	260	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

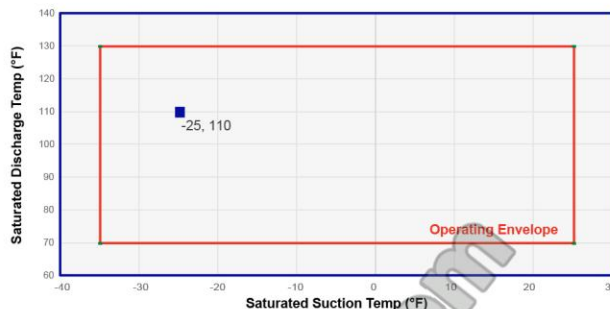

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)												
		-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25
90	Capacity (Btu/hr)	15842	19356	22986	26895	31241	36186	41891	48516	51395	58095	65229	73149	82209
	Power (kW)	3.13	3.35	3.61	3.9	4.2	4.51	4.8	5.07	5.34	5.46	5.52	5.52	5.51
	EER (BTU/WATT-HR)	5.05	5.78	6.37	6.9	7.44	8.03	8.72	9.56	9.62	10.63	11.82	13.24	14.93
	Current (AMPS)	5.98	6.15	6.38	6.67	7	7.38	7.79	8.23	8.86	9.09	9.26	9.36	9.43
110	Capacity (Btu/hr)	12572	15640	18797	22202	26018	30403	35519	41525	42629	48508	54524	61029	68374
	Power (kW)	3.47	3.64	3.87	4.16	4.49	4.85	5.21	5.57	5.86	6.11	6.27	6.37	6.42
	EER (BTU/WATT-HR)	3.63	4.3	4.85	5.33	5.79	6.27	6.82	7.46	7.27	7.94	8.69	9.58	10.65
	Current (AMPS)	6.6	6.67	6.85	7.12	7.49	7.94	8.47	9.07	9.52	10.07	10.66	11.29	11.96
130	Capacity (Btu/hr)	9511	12144	14838	17753	21050	24888	29428	34831	34701	39570	44279	49179	54623
	Power (kW)	4.09	4.17	4.34	4.58	4.88	5.23	5.62	6.02	6.44	6.82	7.1	7.29	7.41
	EER (BTU/WATT-HR)	2.33	2.91	3.42	3.88	4.31	4.75	5.24	5.79	5.39	5.8	6.24	6.75	7.38
	Current (AMPS)	6.87	6.82	6.92	7.15	7.53	8.03	8.65	9.39	10.93	12.26	13.74	15.35	17.1

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR725	6.5	23.9	6	2	1 9/16	1 3/8	7/8	310	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

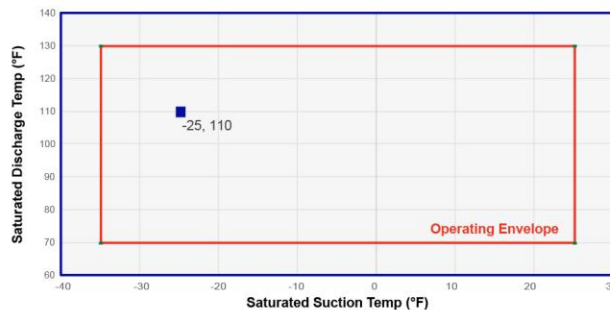

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)												
		-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25
90	Capacity (Btu/hr)	16554	20640	24883	29483	34636	40541	47395	55397	59602	67836	76800	87211	99787
	Power (kW)	3.47	3.75	4.07	4.42	4.79	5.16	5.52	5.86	6.17	6.34	6.43	6.47	6.48
	EER (BTU/WATT-HR)	4.77	5.5	6.11	6.66	7.23	7.85	8.58	9.46	9.66	10.7	11.94	13.47	15.4
	Current (AMPS)	5.82	6.18	6.58	7.03	7.52	8.05	8.61	9.2	9.76	10.08	10.35	10.58	10.79
110	Capacity (Btu/hr)	12611	16120	19733	23648	28063	33175	39182	46281	47632	54816	62175	70427	80287
	Power (kW)	3.75	3.98	4.28	4.63	5.02	5.44	5.88	6.31	6.67	7.01	7.25	7.4	7.5
	EER (BTU/WATT-HR)	3.36	4.05	4.61	5.11	5.59	6.1	6.67	7.33	7.14	7.82	8.58	9.52	10.71
	Current (AMPS)	6.63	6.87	7.19	7.6	8.08	8.64	9.28	9.98	10.5	11.18	11.91	12.71	13.6
130	Capacity (Btu/hr)	8830	11827	14875	18171	21913	26298	31525	37791	37449	43449	49071	55032	62048
	Power (kW)	4.39	4.51	4.73	5.02	5.39	5.8	6.26	6.74	7.16	7.68	8.07	8.35	8.55
	EER (BTU/WATT-HR)	2.01	2.62	3.15	3.62	4.07	4.53	5.04	5.61	5.23	5.66	6.08	6.59	7.25
	Current (AMPS)	7.08	7.13	7.3	7.6	8.02	8.55	9.2	9.95	11.54	12.97	14.56	16.33	18.3

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR228	7.5	28	6	2	1 15/32	1 5/8	7/8	315	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

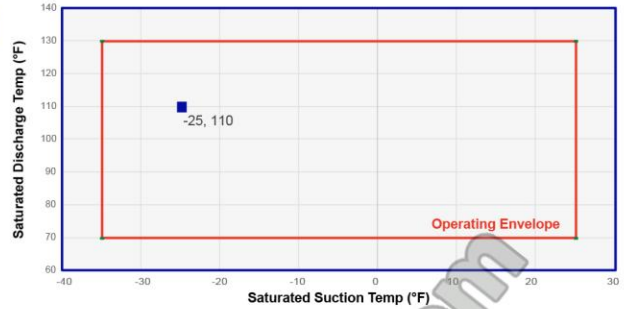

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)												
		-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25
90	Capacity (Btu/hr)	20348	25024	29960	35361	41430	48372	56392	65692	71802	81107	91676	104515	120635
	Power (kW)	4.19	4.48	4.84	5.23	5.65	6.06	6.45	6.81	7.52	7.78	8.01	8.33	8.88
	EER (BTU/WATT-HR)	4.86	5.58	6.19	6.76	7.34	7.98	8.74	9.65	9.54	10.42	11.45	12.55	13.58
	Current (AMPS)	7.38	7.66	8.02	8.45	8.93	9.46	10.02	10.61	11.01	11.54	11.93	12.37	13.04
110	Capacity (Btu/hr)	15245	19301	23572	28260	33571	39709	46876	55278	60175	68637	77480	87712	100341
	Power (kW)	4.61	4.83	5.14	5.52	5.95	6.4	6.87	7.32	8.16	8.64	9	9.37	9.9
	EER (BTU/WATT-HR)	3.31	4	4.59	5.12	5.64	6.2	6.82	7.55	7.38	7.95	8.61	9.36	10.13
	Current (AMPS)	8.41	8.54	8.78	9.13	9.58	10.11	10.72	11.4	12.06	12.71	13.16	13.6	14.22
130	Capacity (Btu/hr)	10001	13559	17286	21385	26061	31517	37958	45587	46012	54616	62720	71334	81463
	Power (kW)	5.65	5.73	5.93	6.22	6.6	7.03	7.5	7.98	8.35	9.2	9.84	10.41	11.06
	EER (BTU/WATT-HR)	1.77	2.37	2.92	3.44	3.95	4.48	5.06	5.71	5.51	5.94	6.37	6.85	7.37
	Current (AMPS)	9.52	9.41	9.45	9.64	9.97	10.43	11	11.69	12.37	13.43	14.24	14.98	15.85

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR337	10	37.1	6	2	1 15/16	1 5/8	1 1/8	325	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

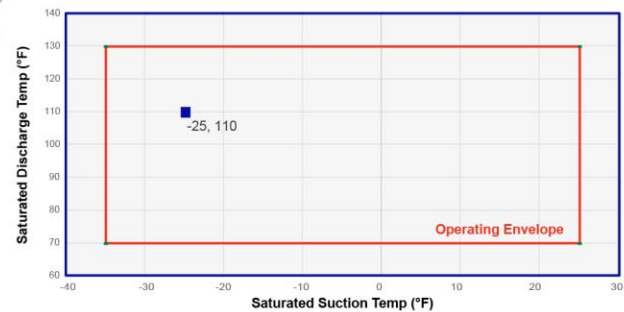

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)												
		-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25
90	Capacity (Btu/hr)	26656	33468	40521	48054	56302	65503	75891	87703	98276	110740	123396	137400	153908
	Power (kW)	5.5	6.07	6.65	7.23	7.82	8.4	8.99	9.59	10.11	10.62	11.04	11.4	11.73
	EER (BTU/WATT-HR)	4.85	5.51	6.09	6.65	7.2	7.8	8.44	9.15	9.72	10.43	11.18	12.05	13.12
	Current (AMPS)	9.6	10.17	10.79	11.45	12.15	12.87	13.62	14.39	14.9	15.47	16	16.49	16.96
110	Capacity (Btu/hr)	18389	25010	31787	38954	46747	55403	65156	76244	83051	94872	106276	118418	132453
	Power (kW)	5.78	6.38	7	7.66	8.34	9.05	9.79	10.55	11.17	11.9	12.54	13.12	13.69
	EER (BTU/WATT-HR)	3.18	3.92	4.54	5.09	5.61	6.12	6.66	7.23	7.44	7.97	8.48	9.02	9.68
	Current (AMPS)	9.74	10.38	11.08	11.86	12.69	13.58	14.52	15.5	16.24	17.21	18.1	18.93	19.69
130	Capacity (Btu/hr)	8736	15259	21847	28738	36166	44367	53578	64033	62135	73419	83679	94068	105740
	Power (kW)	6.15	6.72	7.35	8.03	8.76	9.54	10.38	11.26	12.18	13.17	14.08	14.93	15.77
	EER (BTU/WATT-HR)	1.42	2.27	2.97	3.58	4.13	4.65	5.16	5.68	5.1	5.58	5.94	6.3	6.71
	Current (AMPS)	9.91	10.55	11.29	12.13	13.05	14.05	15.13	16.27	16.46	18.03	19.49	20.86	22.13

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR228	7.5	28	6	2	1 15/32	1 5/8	7/8	315	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

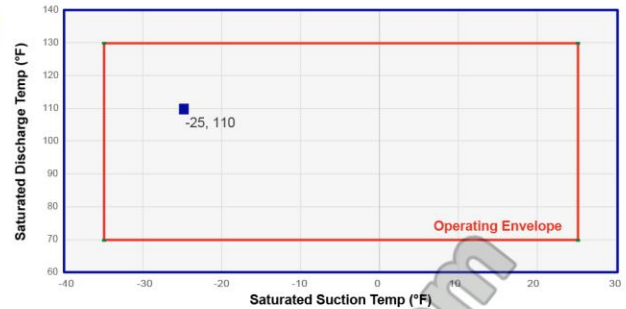

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)												
		-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25
90	Capacity (Btu/hr)	20348	25024	29960	35361	41430	48372	56392	65692	71802	81107	91676	104515	120635
	Power (kW)	4.19	4.48	4.84	5.23	5.65	6.06	6.45	6.81	7.52	7.78	8.01	8.33	8.88
	EER (BTU/WATT-HR)	4.86	5.58	6.19	6.76	7.34	7.98	8.74	9.65	9.54	10.42	11.45	12.55	13.58
	Current (AMPS)	7.38	7.66	8.02	8.45	8.93	9.46	10.02	10.61	11.01	11.54	11.93	12.37	13.04
110	Capacity (Btu/hr)	15245	19301	23572	28260	33571	39709	46876	55278	60175	68637	77480	87712	100341
	Power (kW)	4.61	4.83	5.14	5.52	5.95	6.4	6.87	7.32	8.16	8.64	9	9.37	9.9
	EER (BTU/WATT-HR)	3.31	4	4.59	5.12	5.64	6.2	6.82	7.55	7.38	7.95	8.61	9.36	10.13
	Current (AMPS)	8.41	8.54	8.78	9.13	9.58	10.11	10.72	11.4	12.06	12.71	13.16	13.6	14.22
130	Capacity (Btu/hr)	10001	13559	17286	21385	26061	31517	37958	45587	46012	54616	62720	71334	81463
	Power (kW)	5.65	5.73	5.93	6.22	6.6	7.03	7.5	7.98	8.35	9.2	9.84	10.41	11.06
	EER (BTU/WATT-HR)	1.77	2.37	2.92	3.44	3.95	4.48	5.06	5.71	5.51	5.94	6.37	6.85	7.37
	Current (AMPS)	9.52	9.41	9.45	9.64	9.97	10.43	11	11.69	12.37	13.43	14.24	14.98	15.85

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR337	10	37.1	6	2	1 15/16	1 5/8	1 1/8	325	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

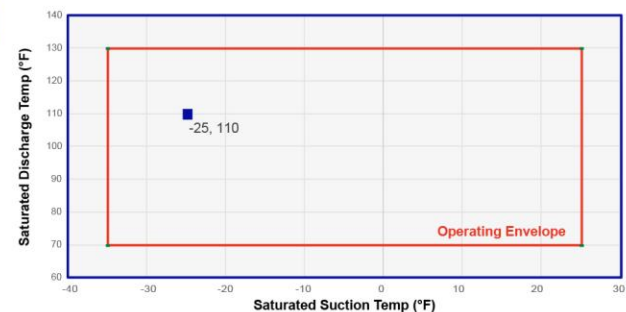

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)												
		-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25
90	Capacity (Btu/hr)	26658	33468	40521	48054	56302	65503	75891	87703	98276	110740	123396	137400	153908
	Power (kW)	5.5	6.07	6.65	7.23	7.82	8.4	8.99	9.59	10.11	10.62	11.04	11.4	11.73
	EER (BTU/WATT-HR)	4.85	5.51	6.09	6.65	7.2	7.8	8.44	9.15	9.72	10.43	11.18	12.05	13.12
	Current (AMPS)	9.6	10.17	10.79	11.45	12.15	12.87	13.62	14.39	14.9	15.47	16	16.49	16.96
110	Capacity (Btu/hr)	18389	25010	31787	38954	46747	55403	65156	76244	83051	94872	106276	118418	132453
	Power (kW)	5.78	6.38	7	7.66	8.34	9.05	9.79	10.55	11.17	11.9	12.54	13.12	13.69
	EER (BTU/WATT-HR)	3.18	3.92	4.54	5.09	5.61	6.12	6.66	7.23	7.44	7.97	8.48	9.02	9.68
	Current (AMPS)	9.74	10.38	11.08	11.86	12.69	13.58	14.52	15.5	16.24	17.21	18.1	18.93	19.69
130	Capacity (Btu/hr)	8736	15259	21847	28738	36166	44367	53578	64033	62135	73419	83679	94068	105740
	Power (kW)	6.15	6.72	7.35	8.03	8.76	9.54	10.38	11.26	12.18	13.17	14.08	14.93	15.77
	EER (BTU/WATT-HR)	1.42	2.27	2.97	3.58	4.13	4.65	5.16	5.68	5.1	5.58	5.94	6.3	6.71
	Current (AMPS)	9.91	10.55	11.29	12.13	13.05	14.05	15.13	16.27	16.46	18.03	19.49	20.86	22.13

06DR541


R407A Refrigerant

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DR541	15	41	6	2	2 5/32	1 5/8	1 1/8	325	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

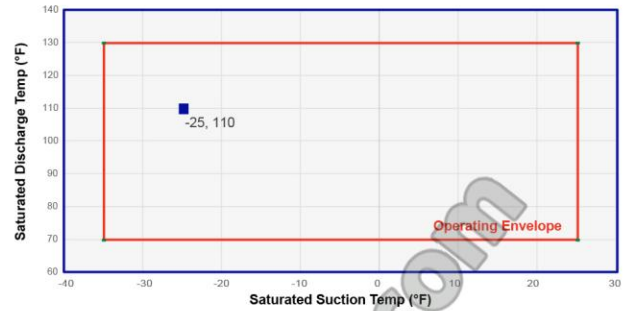

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)												
		-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25
90	Capacity (Btu/hr)	30711	37575	44720	52490	61231	71285	82999	96715	107810	122178	137515	154683	174548
	Power (kW)	6.48	7.19	7.86	8.49	9.11	9.73	10.36	11.02	11.57	11.95	12.2	12.35	12.45
	EER (BTU/WATT-HR)	4.74	5.22	5.69	6.18	6.72	7.33	8.01	8.78	9.32	10.22	11.27	12.52	14.02
	Current (AMPS)	13.6	14.43	15.19	15.91	16.64	17.44	18.33	19.38	20.27	21.13	21.85	22.46	22.98
110	Capacity (Btu/hr)	21600	28789	35944	43407	51522	60635	71088	83225	89276	101904	114871	129038	145271
	Power (kW)	6.37	7.28	8.11	8.9	9.65	10.38	11.11	11.85	12.49	13.15	13.63	13.98	14.24
	EER (BTU/WATT-HR)	3.39	3.96	4.43	4.88	5.34	5.84	6.4	7.03	7.15	7.75	8.43	9.23	10.2
	Current (AMPS)	14.01	15.05	15.99	16.88	17.76	18.68	19.69	20.82	22.23	23.64	25.02	26.39	27.79
130	Capacity (Btu/hr)	9652	17655	25306	32951	40932	49594	59279	70333	72439	82882	93034	103759	115919
	Power (kW)	6.26	7.36	8.37	9.32	10.21	11.06	11.89	12.7	13.46	14.41	15.13	15.69	16.11
	EER (BTU/WATT-HR)	1.54	2.4	3.02	3.54	4.01	4.48	4.99	5.54	5.38	5.75	6.15	6.61	7.2
	Current (AMPS)	13.26	14.61	15.83	16.99	18.11	19.26	20.47	21.78	23.27	25.13	27.06	29.1	31.28

06DM808


R407A Refrigerant

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DM808	3	8	2	2	1 1/4	7/8	5/8	160	3

Available Voltages

208/230-3-60
460-3-60
575-3-60

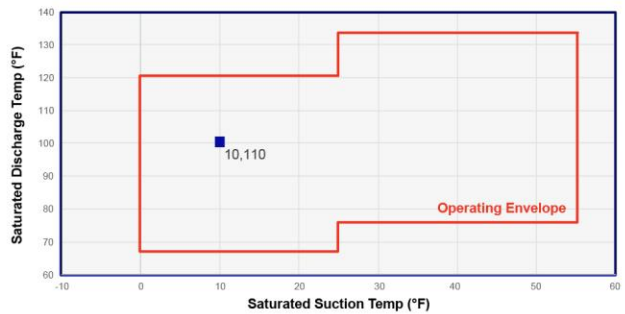


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)											
		-10	-5	0	5	10	15	20	25	30	35	40	45
90	Capacity (Btu/hr)				19086	21885	24870	28174	31929	36264	41313	47207	54077
	Power (kW)				2	2.07	2.09	2.1	2.08	2.06	2.03	2.01	2
	EER (BTU/WATT-HR)				9.54	10.6	11.87	13.44	15.34	17.64	20.37	23.51	27
	Current (AMPS)				3.29	3.41	3.5	3.56	3.62	3.66	3.72	3.78	3.87
110	Capacity (Btu/hr)				14905	17393	19952	22713	25807	29365	33519	38400	44140
	Power (kW)				2.09	2.21	2.3	2.36	2.39	2.42	2.44	2.46	2.5
	EER (BTU/WATT-HR)				7.13	7.86	8.67	9.63	10.78	12.14	13.75	15.6	17.66
	Current (AMPS)				3.55	3.75	3.95	4.15	4.36	4.6	4.86	5.15	5.5
130	Capacity (Btu/hr)				11136	13225	15268	17396	19740	22432	25603	29385	33909
	Power (kW)				2.12	2.31	2.47	2.59	2.69	2.77	2.85	2.93	3.01
	EER (BTU/WATT-HR)				5.25	5.71	6.19	6.72	7.34	8.1	8.99	10.04	11.25
	Current (AMPS)				3.48	3.82	4.18	4.56	4.98	5.44	5.96	6.54	7.19

Physical Data									
Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DM313	5	13	4	2	1	7/8	5/8	235	4 1/2


Available Voltages
208/230-3-60
460-3-60
575-3-60

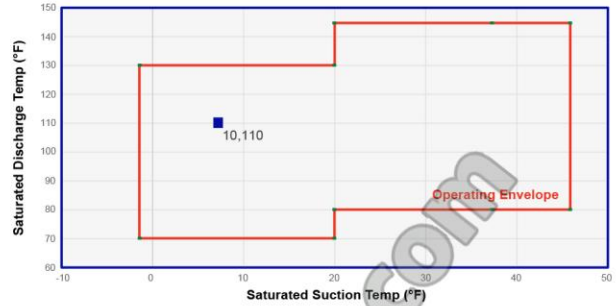

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz													
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)											
		-10	-5	0	5	10	15	20	25	30	35	40	45
90	Capacity (Btu/hr)				29323	33847	38705	44106	50259	57376	65665	75336	86599
	Power (kW)				3.19	3.3	3.36	3.37	3.35	3.32	3.28	3.24	3.23
	EER (BTU/WATT-HR)				9.19	10.25	11.53	13.09	14.99	17.3	20.04	23.22	26.8
	Current (AMPS)				5.35	5.56	5.72	5.84	5.95	6.04	6.14	6.25	6.4
110	Capacity (Btu/hr)				22390	26355	30462	34918	39935	45722	52487	60441	69793
	Power (kW)				3.25	3.46	3.6	3.7	3.77	3.82	3.86	3.91	3.97
	EER (BTU/WATT-HR)				6.89	7.63	8.46	9.43	10.58	11.96	13.58	15.45	17.56
	Current (AMPS)				5.71	6.07	6.42	6.77	7.13	7.52	7.95	8.44	8.99
130	Capacity (Btu/hr)				16307	19593	22827	26220	29981	34318	39443	45563	52889
	Power (kW)				3.21	3.52	3.77	3.98	4.14	4.29	4.43	4.56	4.72
	EER (BTU/WATT-HR)				5.08	5.56	6.05	6.59	7.23	8	8.91	9.98	11.22
	Current (AMPS)				5.52	6.08	6.66	7.27	7.94	8.67	9.48	10.37	11.38

Physical Data									
Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DM316	5	15.9	4	2	1 1/4	1 1/8	5/8	235	4 1/2

Available Voltages
208/230-3-60
460-3-60
575-3-60

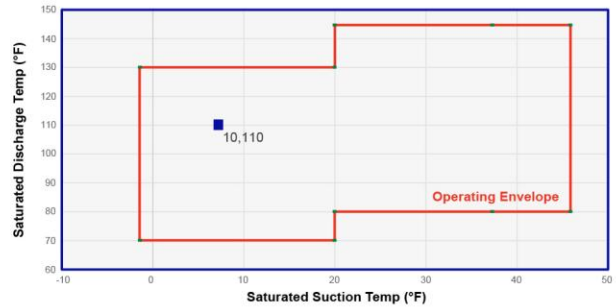


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz													
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)											
		-10	-5	0	5	10	15	20	25	30	35	40	45
90	Capacity (Btu/hr)				37135	42576	48414	54909	62322	70914	80948	92683	106382
	Power (kW)				3.85	4.01	4.11	4.15	4.16	4.15	4.13	4.13	4.15
	EER (BTU/WATT-HR)				9.65	10.62	11.79	13.23	14.98	17.1	19.59	22.47	25.66
	Current (AMPS)				6.28	6.53	6.73	6.91	7.08	7.25	7.43	7.64	7.88
110	Capacity (Btu/hr)				29176	33922	38830	44160	50173	57131	65293	74922	86277
	Power (kW)				4.12	4.4	4.6	4.76	4.87	4.96	5.04	5.13	5.24
	EER (BTU/WATT-HR)				7.09	7.72	8.43	9.28	10.3	11.52	12.96	14.61	16.48
	Current (AMPS)				6.84	7.3	7.79	8.32	8.9	9.56	10.29	11.11	12.04
130	Capacity (Btu/hr)				22196	26114	29959	33992	38474	43667	49829	57224	66111
	Power (kW)				4.29	4.7	5.04	5.31	5.55	5.75	5.95	6.14	6.36
	EER (BTU/WATT-HR)				5.18	5.56	5.95	6.4	6.93	7.59	8.38	9.31	10.4
	Current (AMPS)				6.97	7.74	8.61	9.59	10.69	11.92	13.3	14.84	16.56

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DM337	10	37.1	6	2	1 15/16	1 5/8	1 1/8	325	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

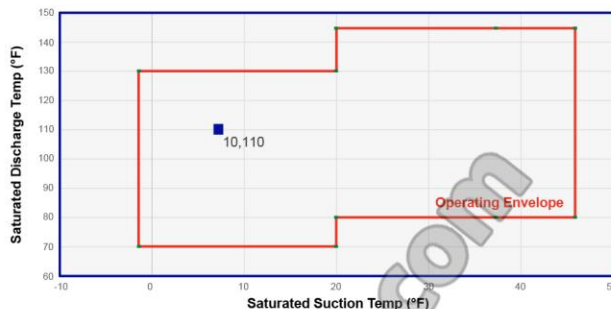

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz


Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)											
		-10	-5	0	5	10	15	20	25	30	35	40	45
90	Capacity (Btu/hr)				91014	103508	116905	131838	148940	168844	192185	219596	251711
	Power (kW)				9.53	9.87	10.04	10.08	10.04	9.94	9.82	9.73	9.7
	EER (BTU/WATT-HR)				9.55	10.49	11.65	13.08	14.84	16.99	19.56	22.56	25.94
	Current (AMPS)				14.01	14.76	15.36	15.83	16.21	16.54	16.86	17.18	17.56
110	Capacity (Btu/hr)				73831	84703	95907	108076	121842	137838	156697	179052	205536
	Power (kW)				10.36	10.96	11.38	11.68	11.88	12.02	12.15	12.29	12.49
	EER (BTU/WATT-HR)				7.13	7.73	8.43	9.26	10.26	11.47	12.9	14.57	16.46
	Current (AMPS)				16.2	17.43	18.6	19.76	20.92	22.14	23.44	24.86	26.43
130	Capacity (Btu/hr)				58745	67718	76454	85585	95744	107563	121675	138713	159309
	Power (kW)				11.12	11.99	12.69	13.25	13.71	14.11	14.49	14.88	15.32
	EER (BTU/WATT-HR)				5.28	5.65	6.03	6.46	6.88	7.32	7.84	8.4	9.04
	Current (AMPS)				17.11	18.83	20.59	22.44	24.41	26.52	28.82	31.34	34.11

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DA818	6.5	18.3	4	2	1 7/16	1 1/8	7/8	250	5 1/2

Available Voltages

208/230-3-60
460-3-60
575-3-60

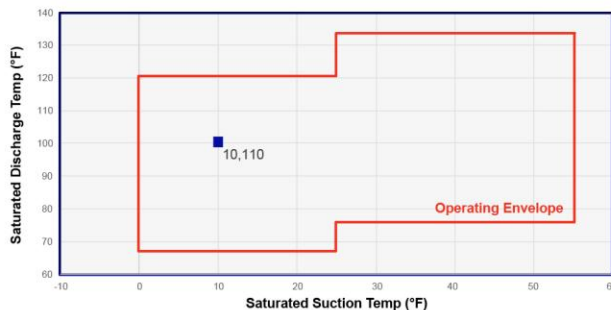


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)											
		-10	-5	0	5	10	15	20	25	30	35	40	45
90	Capacity (Btu/hr)				43250	49663	56513	64098	72717	82671	94259	107781	123536
	Power (kW)				4.42	4.59	4.69	4.72	4.71	4.67	4.63	4.6	4.6
	EER (BTU/WATT-HR)				9.78	10.81	12.06	13.58	15.44	17.69	20.36	23.44	26.88
	Current (AMPS)				7.5	7.82	8.06	8.25	8.41	8.56	8.71	8.89	9.12
110	Capacity (Btu/hr)				33600	39293	45154	51482	58577	66739	76265	87456	100611
	Power (kW)				4.57	4.87	5.1	5.26	5.37	5.46	5.53	5.61	5.72
	EER (BTU/WATT-HR)				7.36	8.06	8.86	9.79	10.9	12.23	13.78	15.58	17.59
	Current (AMPS)				8.05	8.56	9.05	9.53	10.03	10.56	11.15	11.8	12.55
130	Capacity (Btu/hr)				24936	29706	34377	39249	44621	50792	58061	66727	77090
	Power (kW)				4.57	5.03	5.41	5.71	5.97	6.19	6.4	6.62	6.85
	EER (BTU/WATT-HR)				5.46	5.91	6.36	6.87	7.47	8.2	9.07	10.09	11.25
	Current (AMPS)				7.86	8.61	9.38	10.2	11.07	12.02	13.08	14.25	15.56

Physical Data										
Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)	
06DA825	7.5	23.9	6	2	1 9/16	1 3/8	1 1/8	315	8	


Available Voltages
208/230-3-60
460-3-60
575-3-60

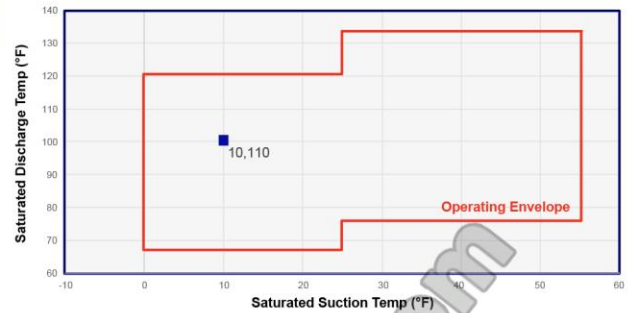

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz													
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)											
		-10	-5	0	5	10	15	20	25	30	35	40	45
90	Capacity (Btu/hr)				54694	62993	71968	82021	93555	106972	122673	141061	162537
	Power (kW)				5.59	5.8	5.92	5.97	5.99	5.98	5.97	5.99	6.07
	EER (BTU/WATT-HR)				9.79	10.86	12.16	13.73	15.63	17.9	20.54	23.53	26.79
	Current (AMPS)				9.13	9.55	9.88	10.16	10.4	10.64	10.89	11.18	11.55
110	Capacity (Btu/hr)				42403	49545	56977	65101	74317	85028	97635	112540	130144
	Power (kW)				5.88	6.24	6.5	6.69	6.83	6.95	7.06	7.19	7.37
	EER (BTU/WATT-HR)				7.21	7.94	8.76	9.73	10.88	12.24	13.83	15.65	17.66
	Current (AMPS)				10.02	10.67	11.3	11.93	12.58	13.28	14.06	14.94	15.95
130	Capacity (Btu/hr)				31920	37750	43484	49524	56270	64125	73490	84766	98355
	Power (kW)				6.09	6.62	7.05	7.39	7.68	7.94	8.19	8.46	8.76
	EER (BTU/WATT-HR)				5.24	5.7	6.17	6.7	7.32	8.07	8.97	10.02	11.23
	Current (AMPS)				10.05	10.98	11.95	12.98	14.09	15.31	16.66	18.17	19.86

Physical Data										
Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)	
06DA328	10	28	6	2	1 15/32	1 3/8	1 1/8	315	8	

Available Voltages
208/230-3-60
460-3-60
575-3-60

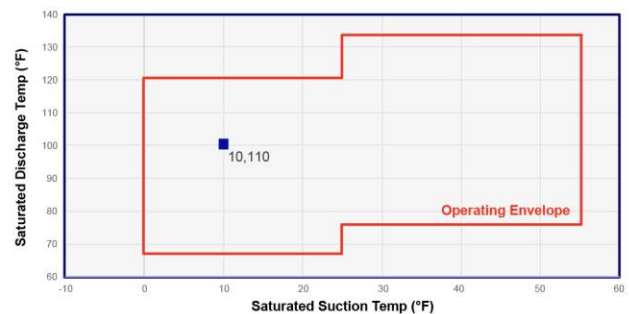


Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz													
Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)											
		-10	-5	0	5	10	15	20	25	30	35	40	45
90	Capacity (Btu/hr)				67173	76747	87079	98653	111956	127471	145684	167079	192141
	Power (kW)				6.91	7.14	7.25	7.28	7.26	7.2	7.14	7.11	7.12
	EER (BTU/WATT-HR)				9.72	10.75	12.01	13.54	15.42	17.7	20.4	23.51	26.97
	Current (AMPS)				10.69	11.22	11.64	11.98	12.26	12.51	12.77	13.04	13.37
110	Capacity (Btu/hr)				53712	61971	70524	79858	90456	102802	117381	134677	155173
	Power (kW)				7.32	7.71	7.99	8.19	8.32	8.42	8.52	8.64	8.8
	EER (BTU/WATT-HR)				7.34	8.04	8.82	9.75	10.87	12.21	13.78	15.6	17.63
	Current (AMPS)				11.99	12.83	13.63	14.41	15.22	16.06	16.98	17.99	19.13
130	Capacity (Btu/hr)				42130	48902	55507	62431	70157	79169	89951	102988	118764
	Power (kW)				7.7	8.28	8.73	9.1	9.41	9.68	9.94	10.22	10.54
	EER (BTU/WATT-HR)				5.47	5.91	6.35	6.86	7.46	8.18	9.05	10.08	11.26
	Current (AMPS)				12.36	13.49	14.67	15.9	17.22	18.65	20.23	21.97	23.9

Physical Data

Model	Nominal HP	Displ. CFM	No. of Cylinders	Bore (in)	Stroke (in)	Suction Line Size (in)	Discharge Line Size (in)	Shipping Weight (lbs)	Oil Charge (pints)
06DA537	15	37.1	6	2	1 15/16	1 5/8	1 1/8	325	8

Available Voltages

208/230-3-60
460-3-60
575-3-60

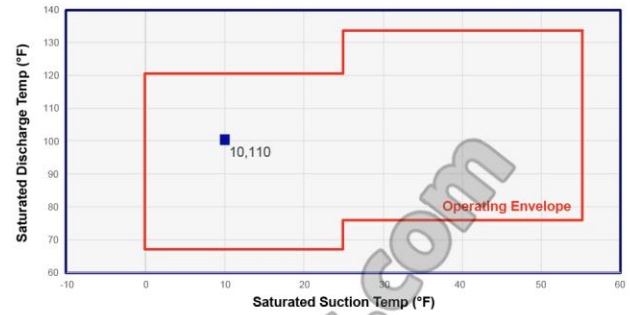

Tabular Data Summary – Fixed RGT = 65°F Subcooling = 0°F Voltage: 460-3-60Hz

Saturated Condensing Temperature (F)		Saturated Suction Temperature (F)											
		-10	-5	0	5	10	15	20	25	30	35	40	45
90	Capacity (Btu/hr)				92876	105696	119479	134882	152560	173169	197365	225804	259141
	Power (kW)				9.72	10.09	10.3	10.38	10.37	10.3	10.22	10.16	10.15
	EER (BTU/WATT-HR)				9.55	10.47	11.6	13	14.72	16.81	19.31	22.23	25.52
	Current (AMPS)				15.2	15.96	16.57	17.06	17.47	17.84	18.2	18.58	19.03
110	Capacity (Btu/hr)				75243	86370	97852	110342	124497	140970	160417	183494	210855
	Power (kW)				10.32	10.94	11.4	11.73	11.98	12.17	12.34	12.53	12.78
	EER (BTU/WATT-HR)				7.29	7.89	8.58	9.4	10.4	11.59	13	14.64	16.49
	Current (AMPS)				16.92	18.11	19.26	20.41	21.59	22.85	24.21	25.72	27.4
130	Capacity (Btu/hr)				59870	69037	77950	87263	97631	109709	124152	141614	162751
	Power (kW)				10.88	11.76	12.47	13.06	13.56	14.01	14.44	14.89	15.4
	EER (BTU/WATT-HR)				5.5	5.87	6.25	6.68	7.2	7.83	8.6	9.51	10.56
	Current (AMPS)				17.37	19	20.72	22.54	24.52	26.68	29.07	31.71	34.65